

EAFA



地址:广东省佛山市南海区罗村街边七星工业区

ADD: No. 1, Lane 5, Zone A, Tenth Road, Qixing Industrial Zone, Luocun Street, Shishan Town, Nanhai District, Foshan City, Guangdong Province

TEL: + 86 18126652851 URL: <https://eafadoors.com/>

EAFA



6A ALL-IN-ONE SYSTEM
DOORS AND WINDOWS



EAFA

**6A ALL IN
ONE SYSTEM
DOORS
AND WINDOWS**

FULL RANGE 6A All-in-One System Doors and Windows



All-Rounder Series



Guardian Series



Dream Series

NEW HEIGHTS Ultra-Slim System Doors and Windows



i-System
casement window



i-System
folding window



i-System
central window



i-System
sliding windows



i-System
High-Performance Window

STRONG STYLE Jing Space Chinese-Style Antique-Look Doors and Windows



Home Series




Court Series



Fu Series



Aluminium Components

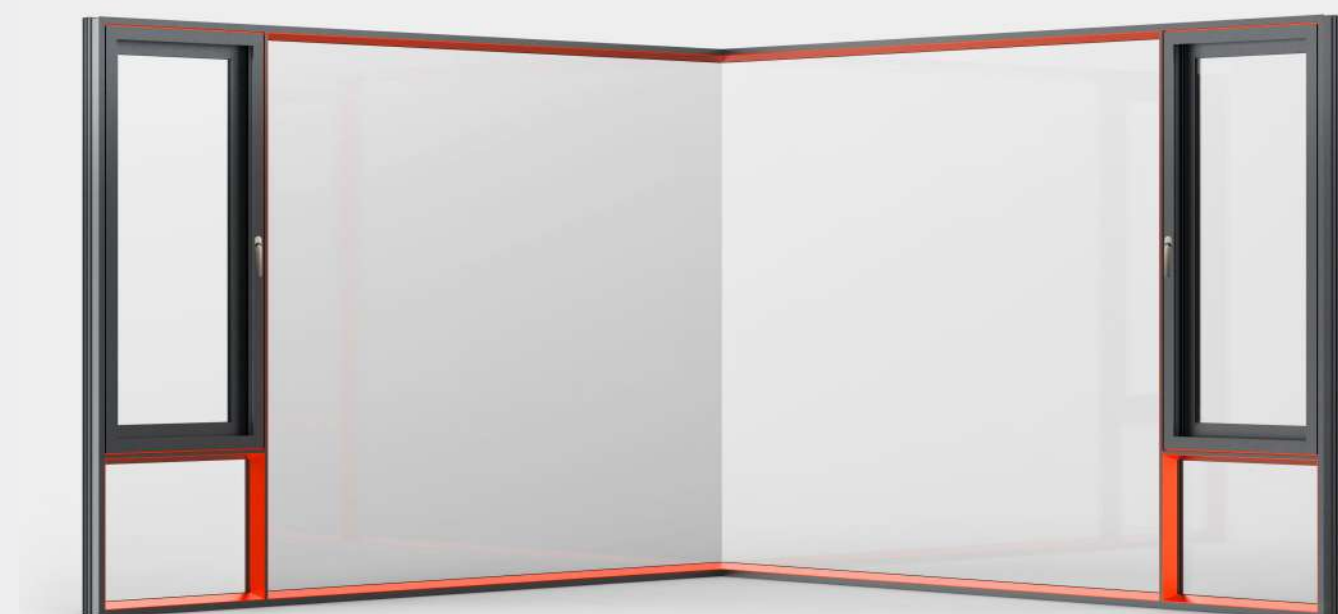



ONE CHOICE LIFELONG PROTECTION



BRAND INTRODUCTION

EAFA was founded in Foshan, Guangdong in 2004 and is a company that integrates independent research and developmentLarge scale high-end aluminum alloy system doors and windows manufacturing integrating production, sales, and serviceService providers. EAFA mission is to protect millions of families and open the window of dreams,Adhering to the service value of "one choice, lifelong protection", we have won numerous awardsInfluent brands in the industry, top 10 brands loved by consumers for doors and windows, and first-line door and window enterprisesBrand and other honors

EAFA positions the 6A all-in-one system doors and windows, integrating sound insulation, heat insulation, and waterproofingThe six major performance indicators of airtightness, wind resistance, and safety are integrated into one window, dedicated to serving consumersTo provide high-quality doors and windows, and to contribute to the beauty of being the leader in all powerful system doors and windowsStrive unremittingly towards our vision!

There are over 500 stores nationwide, covering more than 400 cities, making it the only one in the industryA door and window brand that has been featured in CCTV's "National Brands" program

It has 6A universal system doors and windows, Domina extremely narrow system doors and windowsThree major product matrices of Chinese style antique doors and windows in space.

CORPORATE MISSION

Protecting billions of families and
opening the window of dreams

CORPORATE VISION

The leader of versatile system doors
and windows

CONSUMER SERVICE VALUE

One choice, lifelong protection






GLOBAL STRATEGIC PARTNER

THE INDUSTRY'S MOST COMPREHENSIVE
AND HIGH-QUALITY NETWORK OF SUPPLY
CHAIN PARTNERS


EAFA has always been committed to producing high-performance products. For the past 20 years, we have continuously sourced premium materials worldwide, strengthened supply chain integration, leveraged cross-industry resources, and collaborated on the development of high-quality products, ensuring every step of the process meets the highest standards.

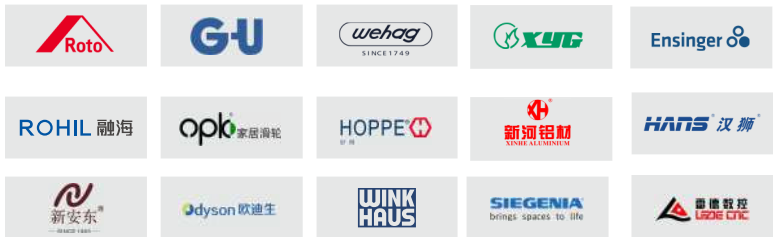

Creating high-quality six core performance

6A ALL IN ONE SYSTEM DOORS AND WINDOWS

EAFA adheres to creating high-quality six core performance, streamlining processing, balancing appearance and performance, enhancing the practicality of doors and windows, integrating ideas into works, and combining beauty and practicality perfectly.

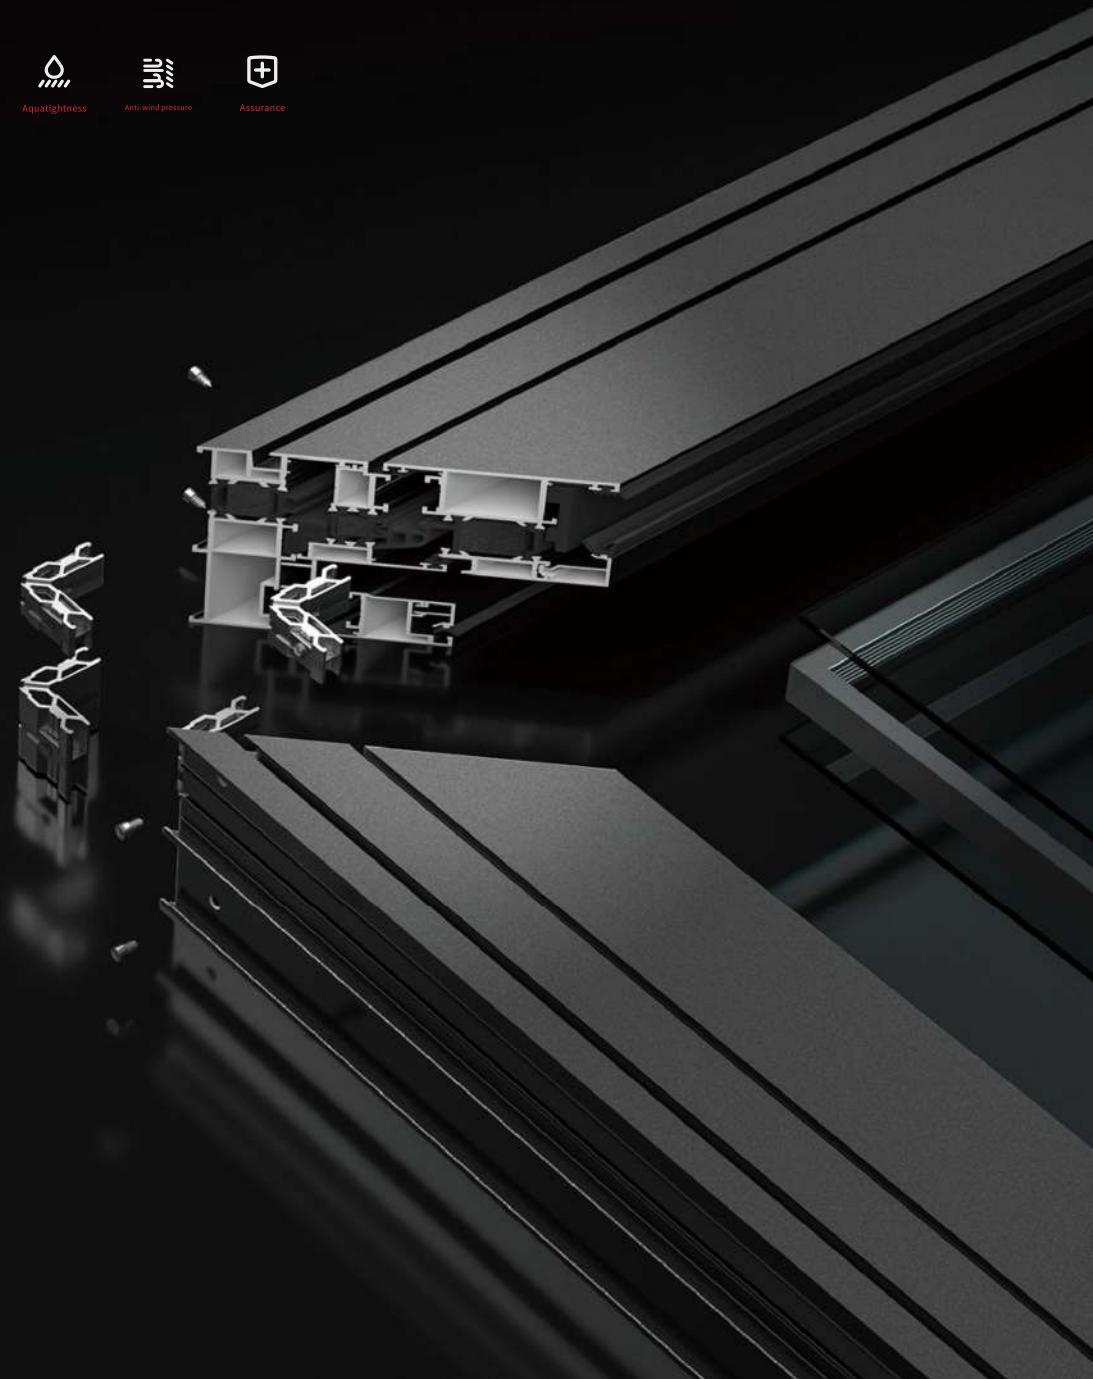

V8 OUTWARD OPENING WINDOW

PRODUCT HIGHLIGHTS


- *Four-chamber structure for double the support and stability
- *Dual-injection molding process ensures leak-free, reinforced joints
- *Reinforced support ribs for multi-point load balancing
- *55mm wider sash with a closed-edge design
- *Vertical isotherm design with three EPDM foam gaskets


PRODUCT SPECIFICATIONS

1.8mm	110*25*43mm	110*25*61mm
Main wall thickness	Outer frame	Mullion

47*72*55mm	5mm+20A+5mm
Sash width	Glass configuration

SELECTIVE COLOR

					
Flash Silver Grey	Starry Sky Grey	Gong Tingbai	Metal coffee	Anthra-zinc	Champagne Gold

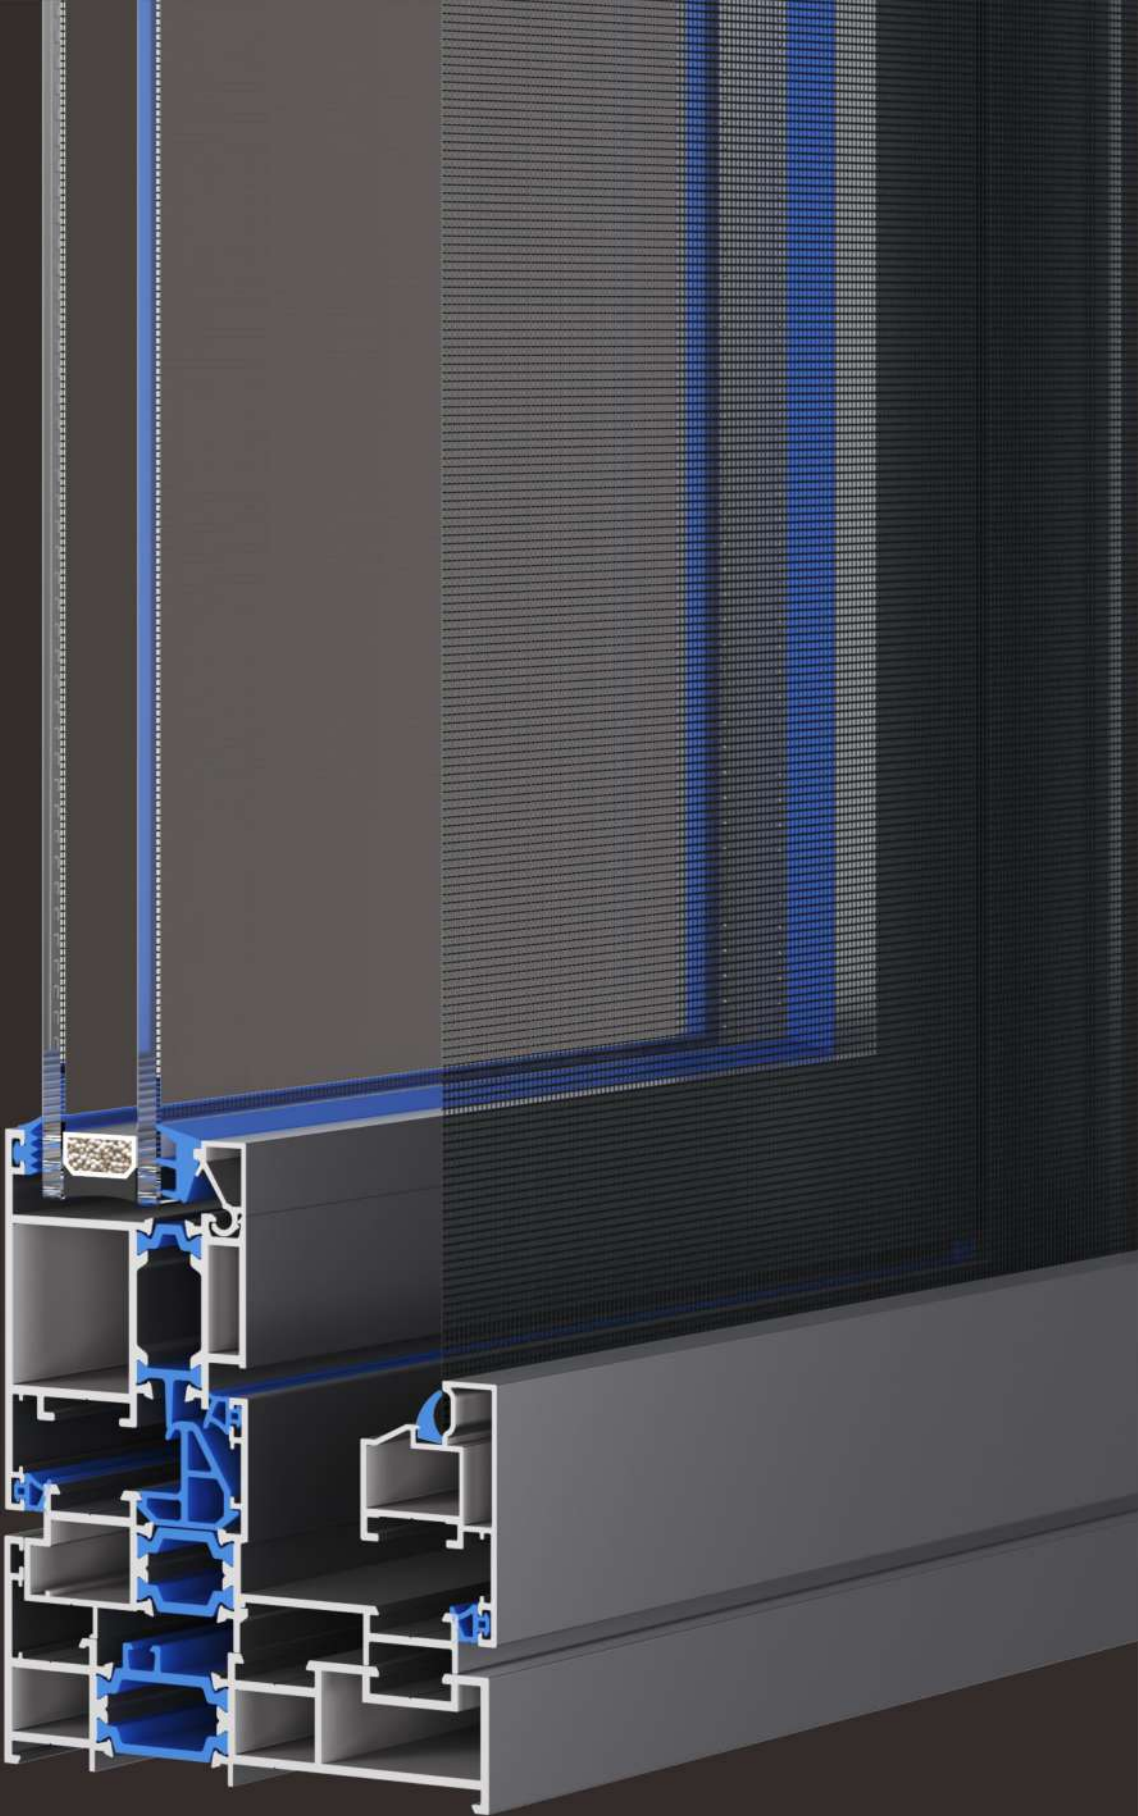



V8 OUTWARD OPENING WINDOW



NEVER STOP THE 8TH GENERATION BREAKS NEW GROUND

Thickened insulated glass

Optional configuration: 15mm + 18A + 15mm

Configuration (total thickness: 48mm)

Sound insulation: $R_w \geq 35\text{dB}$


Maximum application area: 12 m²

• Meets the requirements for large-scale window

installations



V8



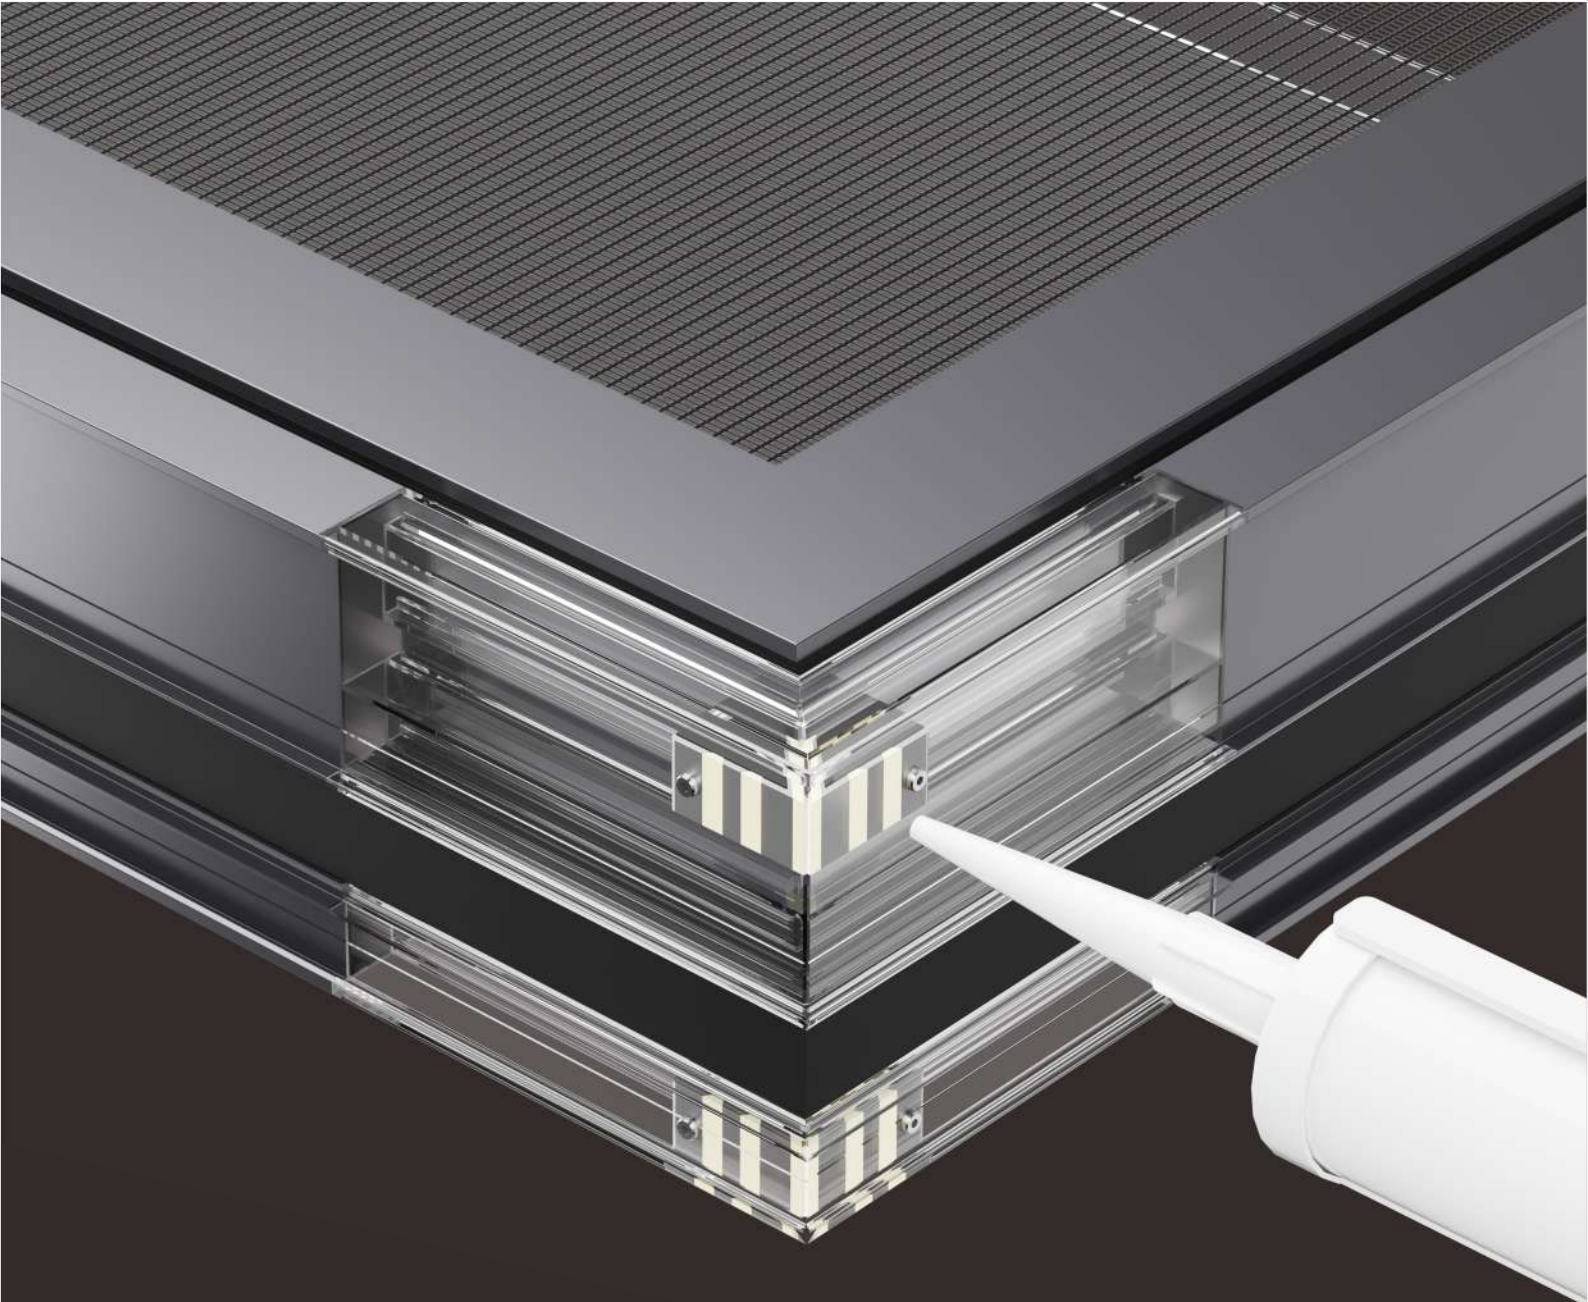

**DUAL INJECTION PROCESS
CORNER JOINT DOUBLE BRACKET
INJECTION PROCESS**

No leaks at the joints,
greater strength,
and enhanced overall stability

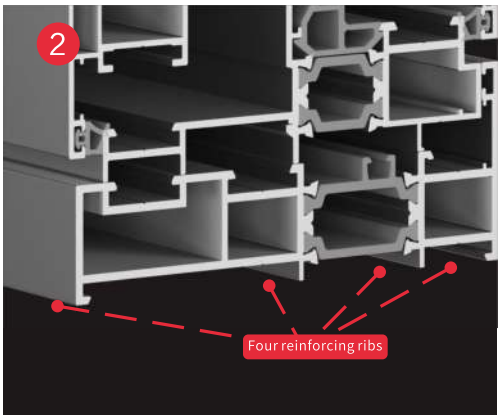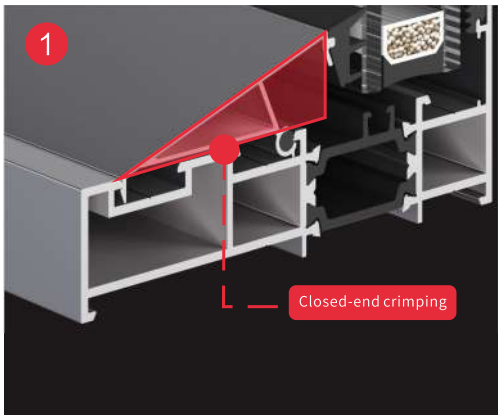

**ULTIMATE STRUCTURAL STRENGTH
WIND RESISTANT
AND DURABLE STABLE AS A ROCK**

110mm wide frame + 1.8mm main wall thickness: significantly enhances the structural strength of the profile. Wind resistance meets the highest grade of the national standard GB/T 8478-2020, easily withstanding extreme weather conditions.

3

**55MM FAN DEPTH
COMPARED
TO THE STANDARD 45MM FAN DEPTH**

22% increase in strength. Improved structural stability. Can support the weight of larger glass panels.

22%
INCREASE IN STRENGTH



VERTICAL ISOOTHERM DESIGN

Thermal break strips and pressure-equalizing gaskets on the same production line. Reduce heat transfer, save energy, and lower consumption. Create a temperature-controlled environment.

4

D17 OUTWARD-OPENING WINDOW

PRODUCT HIGHLIGHTS

- The 7-cavity body material cannot be shaken by the wind!
- The overall wall thickness is 2.0, which cannot be destroyed by a typhoon!
- Four border support ribs with super strong load-bearing capacity
- 24mm glass slot depth suitable for thick glass plates
- Thickened wing edge 2.3mm, strong wind does not tremble


PRODUCT SPECIFICATIONS

2.0mm	120*28*52mm	120*28*78mm
Overall wall thickness	Outer frame	Mullion

68*72mm	5mm+20A+5mm/5mm +20A+5mm LOW-E
Sash width	Glass configuration

SELECTIVE COLOR


					
Flash Silver Grey	Starry Sky Grey	Gong Tingbai	Metal coffee	Anthra-zinc	Champagne Gold

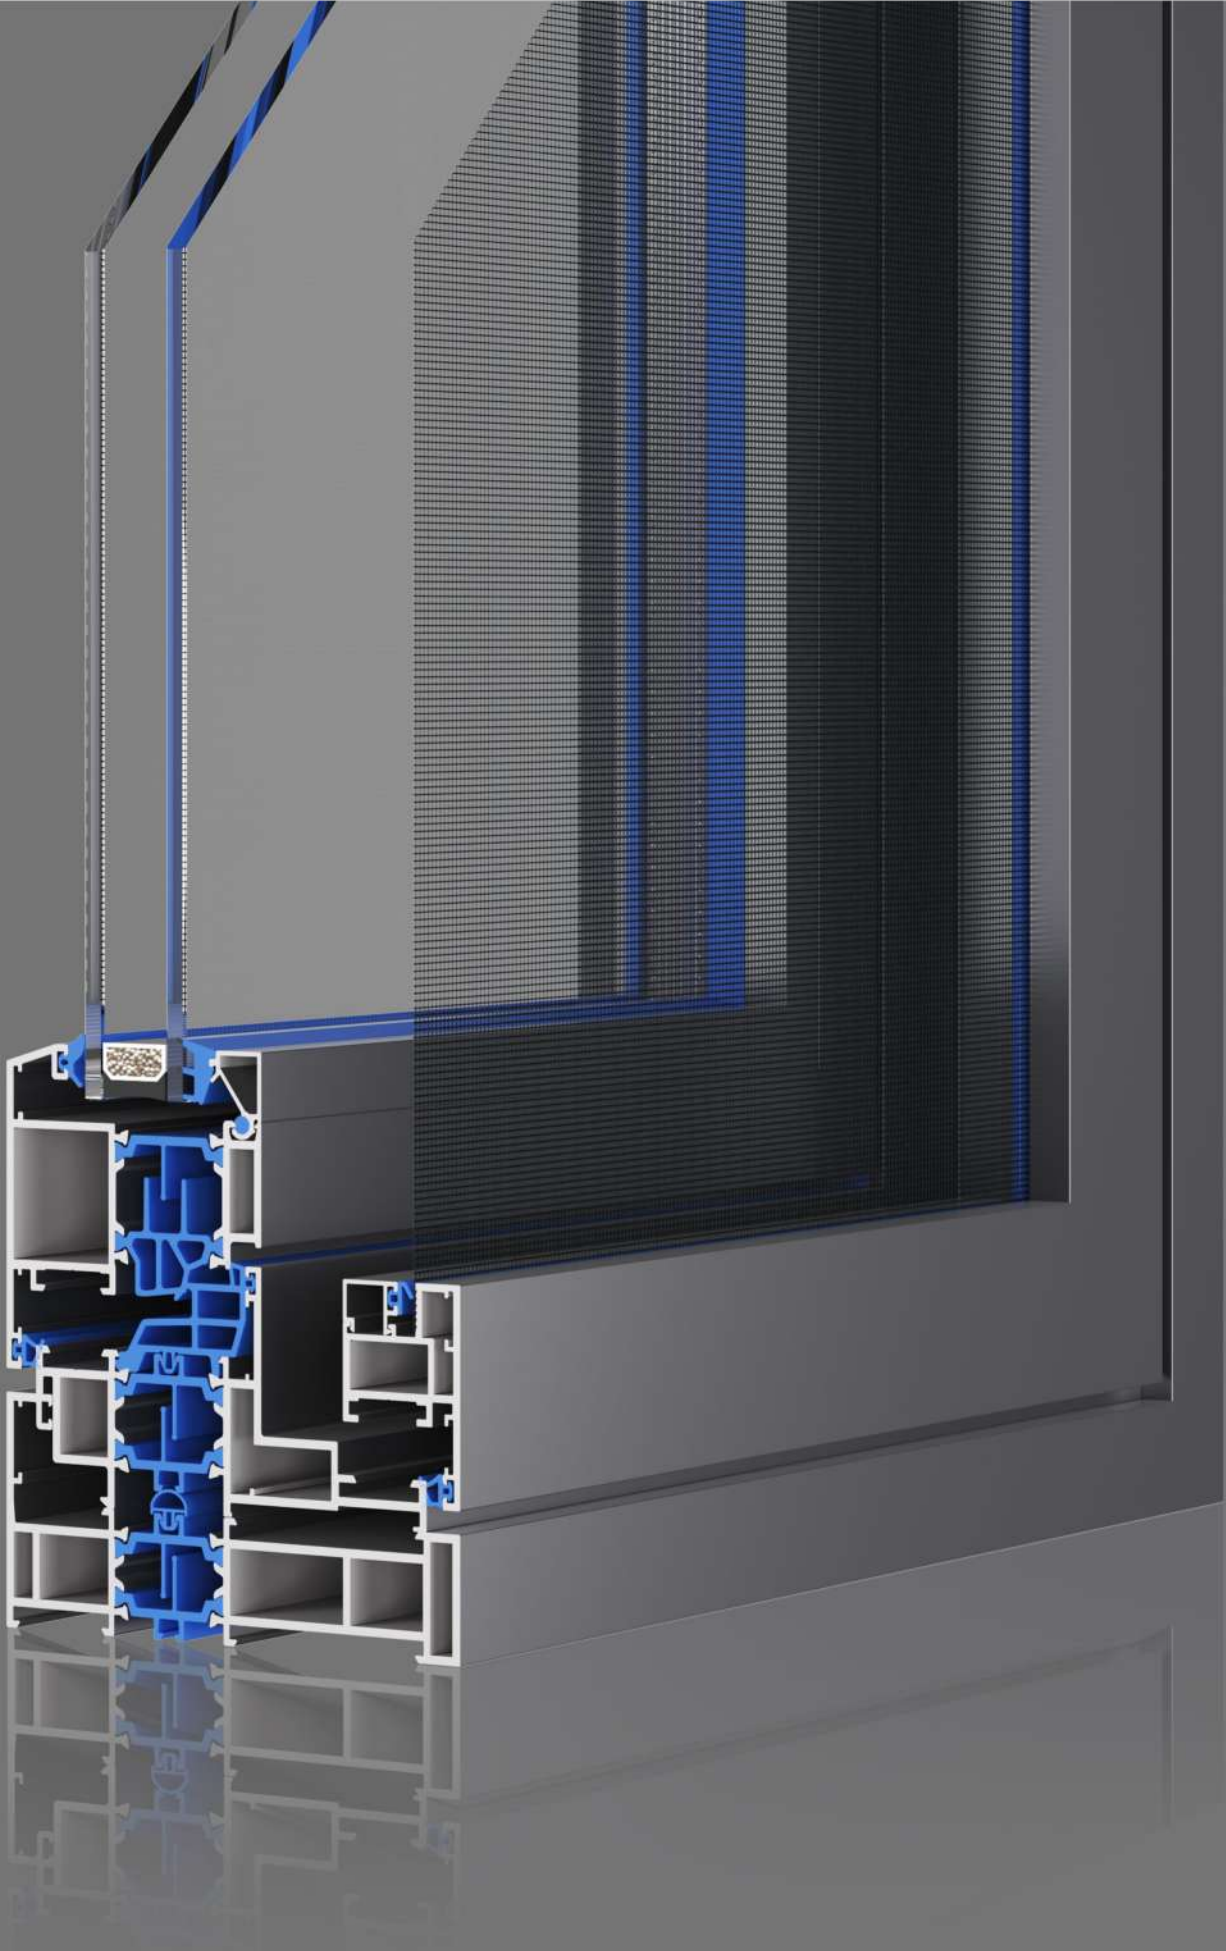



D17 OUTWARD OPENING WINDOW



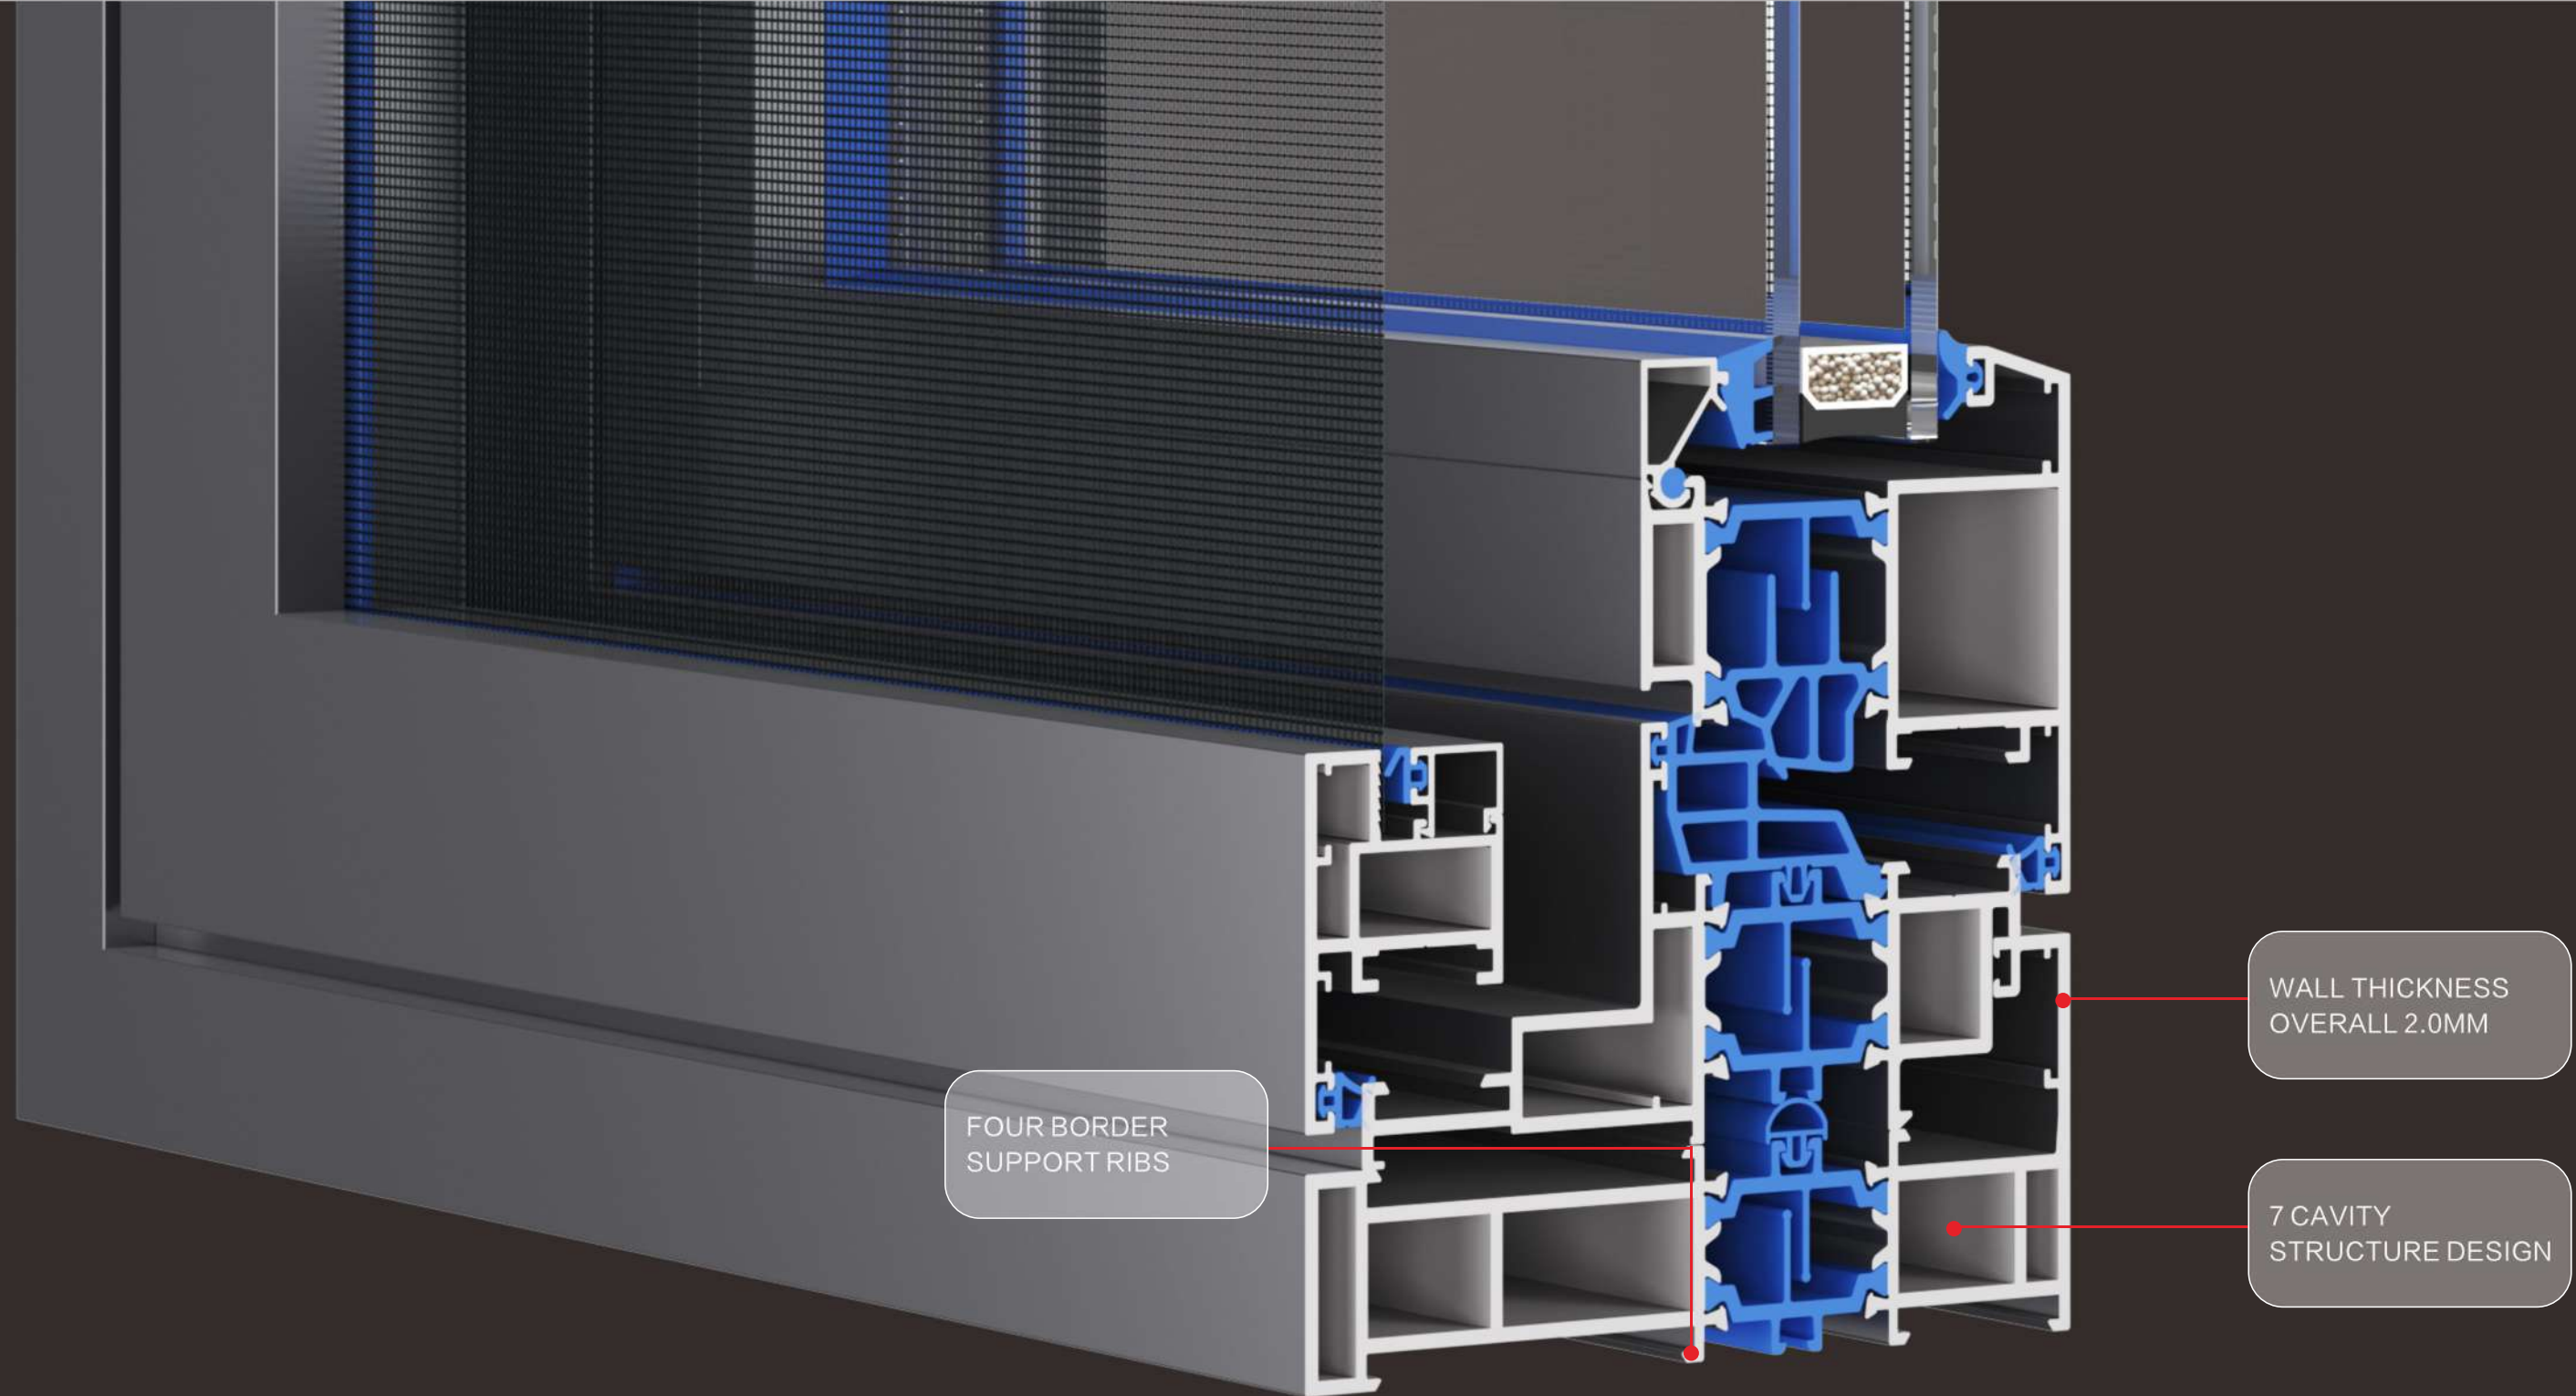

PROFILE SYSTEM



GLAZING SYSTEM


CLOSED OBLIQUE ANGLE WITH A WIDE FIELD OF VIEW
WIND RESISTANT WITHOUT BOUNDARIES, MORE REASSURING

The design of closed oblique pressure line forms a golden triangle mechanical support
Convert the impact force of typhoon into internal force of triangular frame

GLAZING SYSTEM

DEEPENING THE GROOVE MAKES THE GLASS MORE STABLE

Total depth of 24mm glass groove (conventional 15mm)
Larger glass provides deeper embedding space, enhancing stability and safety
A single piece of glass can cover a maximum area of 15 square meters, allowing for both visibility and safety

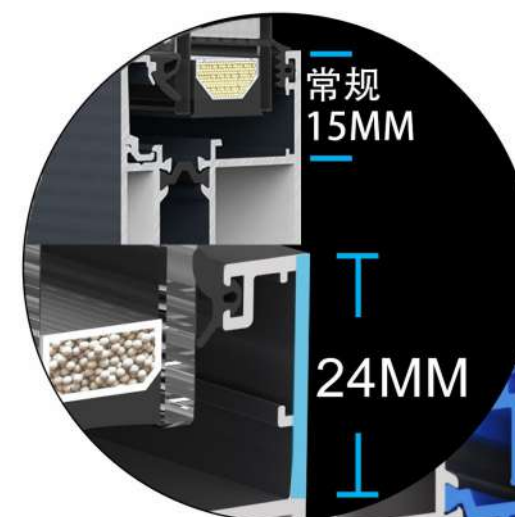

24MM


常规
15MM

24MM

GLAZING SYSTEM

HIGH STRENGTH CRYSTAL SHIELD
EXPLOSION AND IMPACT RESISTANCE


Standard configuration includes ultra white tempered glass
with minimal impurities and uniform stress
Self explosion rate $\leq 0.01\%$ (0.3% self explosion rate for ordinary tempered glass)

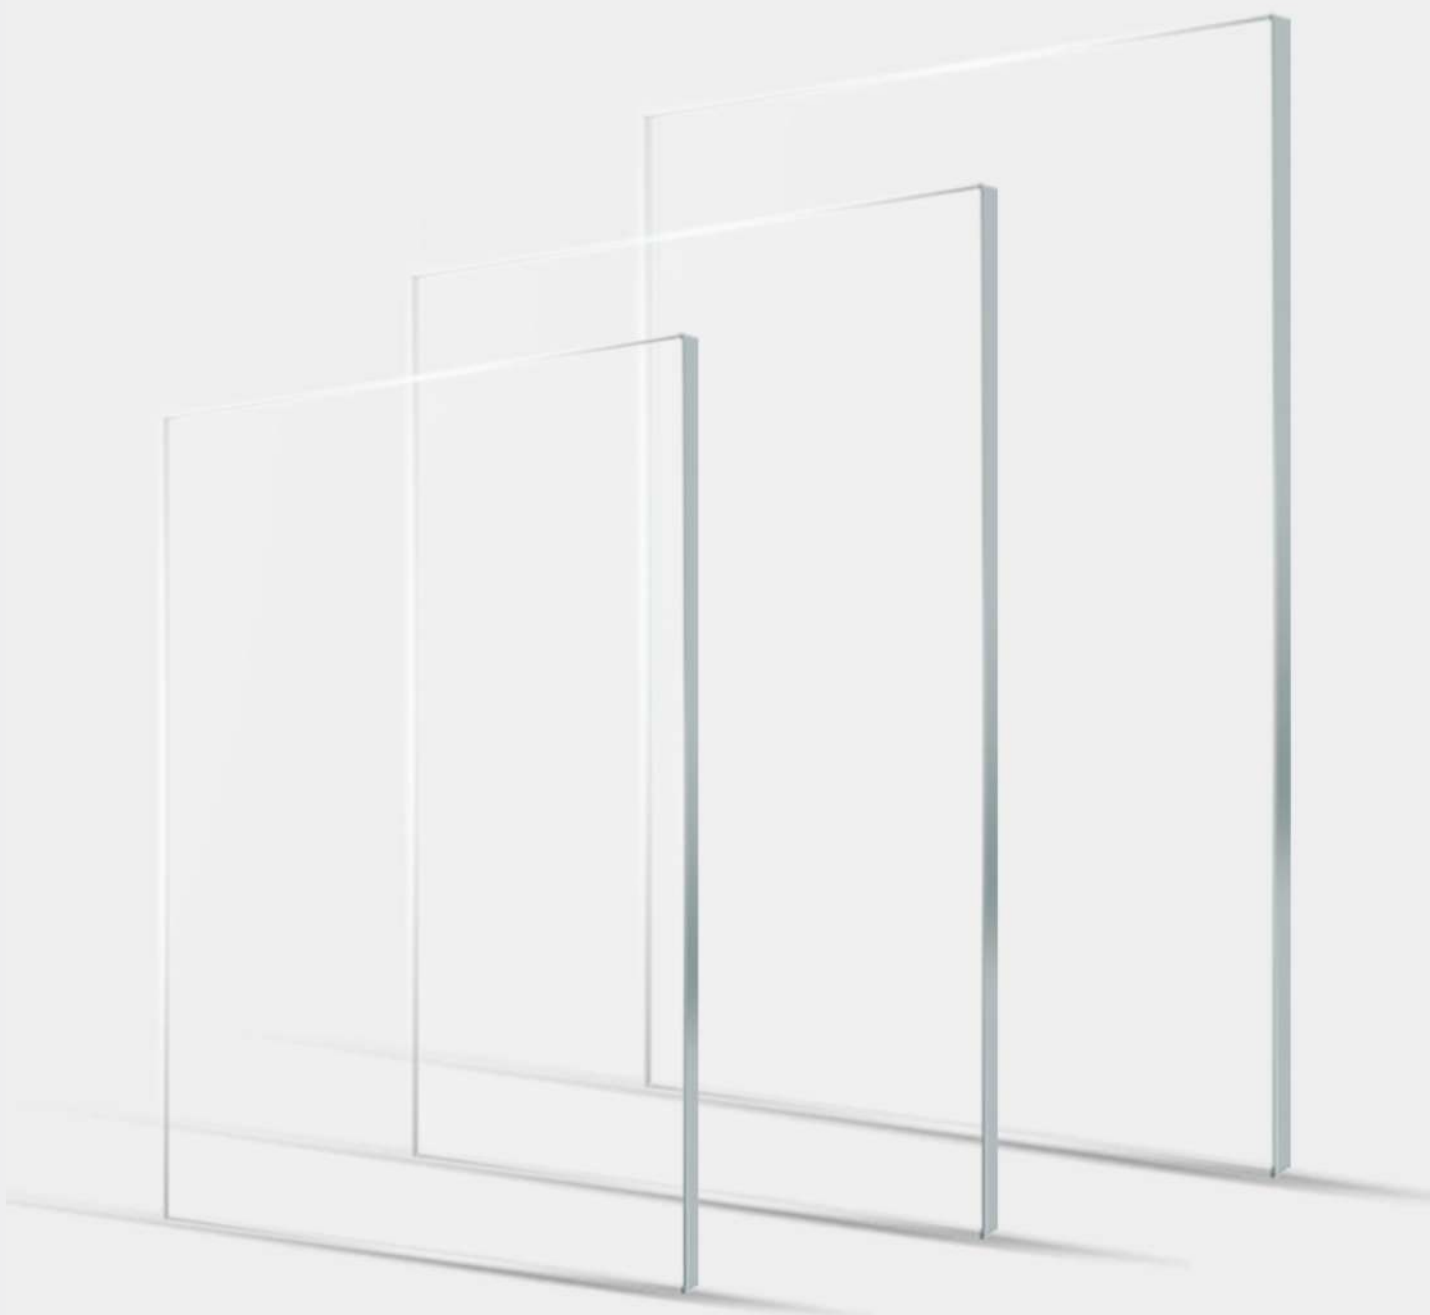

HARDWARE SYSTEM

STRENGTHEN AND STABILIZE SUPPORT

15 inch oversized hinge, 3mm thick 304 stainless steel,
Multi link structure for better safety, with a single fan bearing capacity of up to 80kg

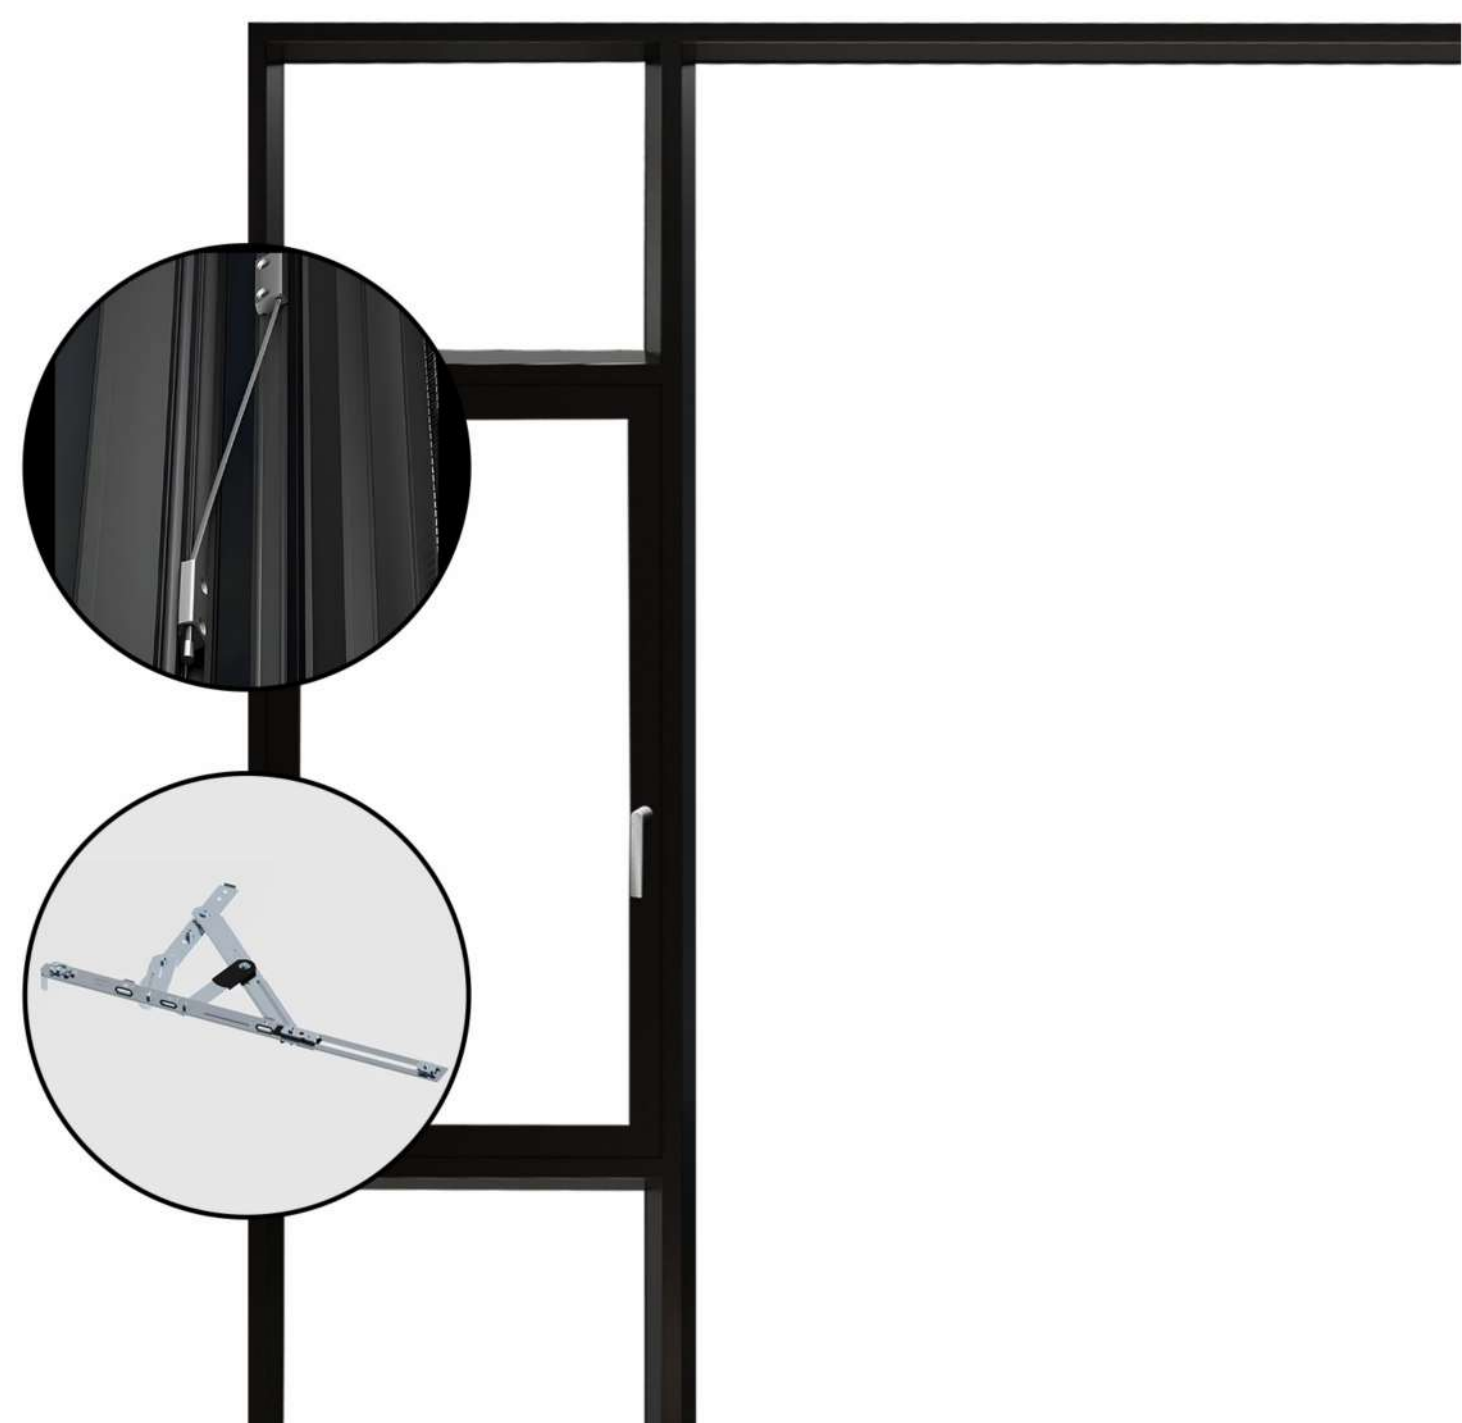

90S OUTWARD-OPENING WINDOW

PRODUCT HIGHLIGHTS


- Ultra wide insulation strip effectively isolates heat transfer
- Weihagen, Germany, no pedestal double high handle
- Welding process for the entire frame of the main sealing strip
- Ultra clear diamond mesh, ultra narrow protective fence
- 20 customized Morandi colors

PRODUCT SPECIFICATIONS

1.8mm	115*25mm	115*65*25mm
Main wall thickness	Outer frame	Mullion

45*72*52mm	5mm+20A+5mm
Sash width	Glass configuration

REGULAR COLORS

					
Flash Silver Grey	Starry Sky Grey	Gong Tingbai	Metal coffee	Anthra-zinc	Champagne Gold

OPTIONAL COLORS

						
Cocoa Egg Milk	milk coffee	Pure Years	Blueberry milkshake	Deep Space	sea salt cheese	baby blue
						
grayish blue	Yalu	Matcha Quiet Green	spacewalk	silver coin	medium gray	Cream Gray
						
rock ash	Northern Mountains and Rivers	London Fog	Deer skin	Ya Ci Brown	Soft Light Latte Brown	Dark Brown





90S OUTWARD OPENING WINDOW



**NOW IT'S MY TURN TO BE BORN IN THE 1990S,
TO GIVE YOU A SENSE OF SECURITY**

Yarn fan with 4-corner R-angle protection, rounded and free of edges and corners
Thoroughly eliminate the hidden dangers of indoor corners and bumps
Paired with anti fall chains, it provides a second layer of protection for the window sash, giving it a full sense of security




**LOOK! THE INNER PASSION OF
THE POST-90S GENERATION**

Thermal insulation cotton filling further enhances the insulation performance of windows
35.3mm ultra wide insulation strip effectively isolates heat transfer



**RELIABLE, STABLE, AND RESPONSIBLE
THIS IS THE '90S GENERATION'**

Adopting advanced closed oblique pressure line technology and expansion type injection angle code Strengthening the outer frame of the large glass sealed window Greatly enhance the wind resistance performance of windows, making them more stable

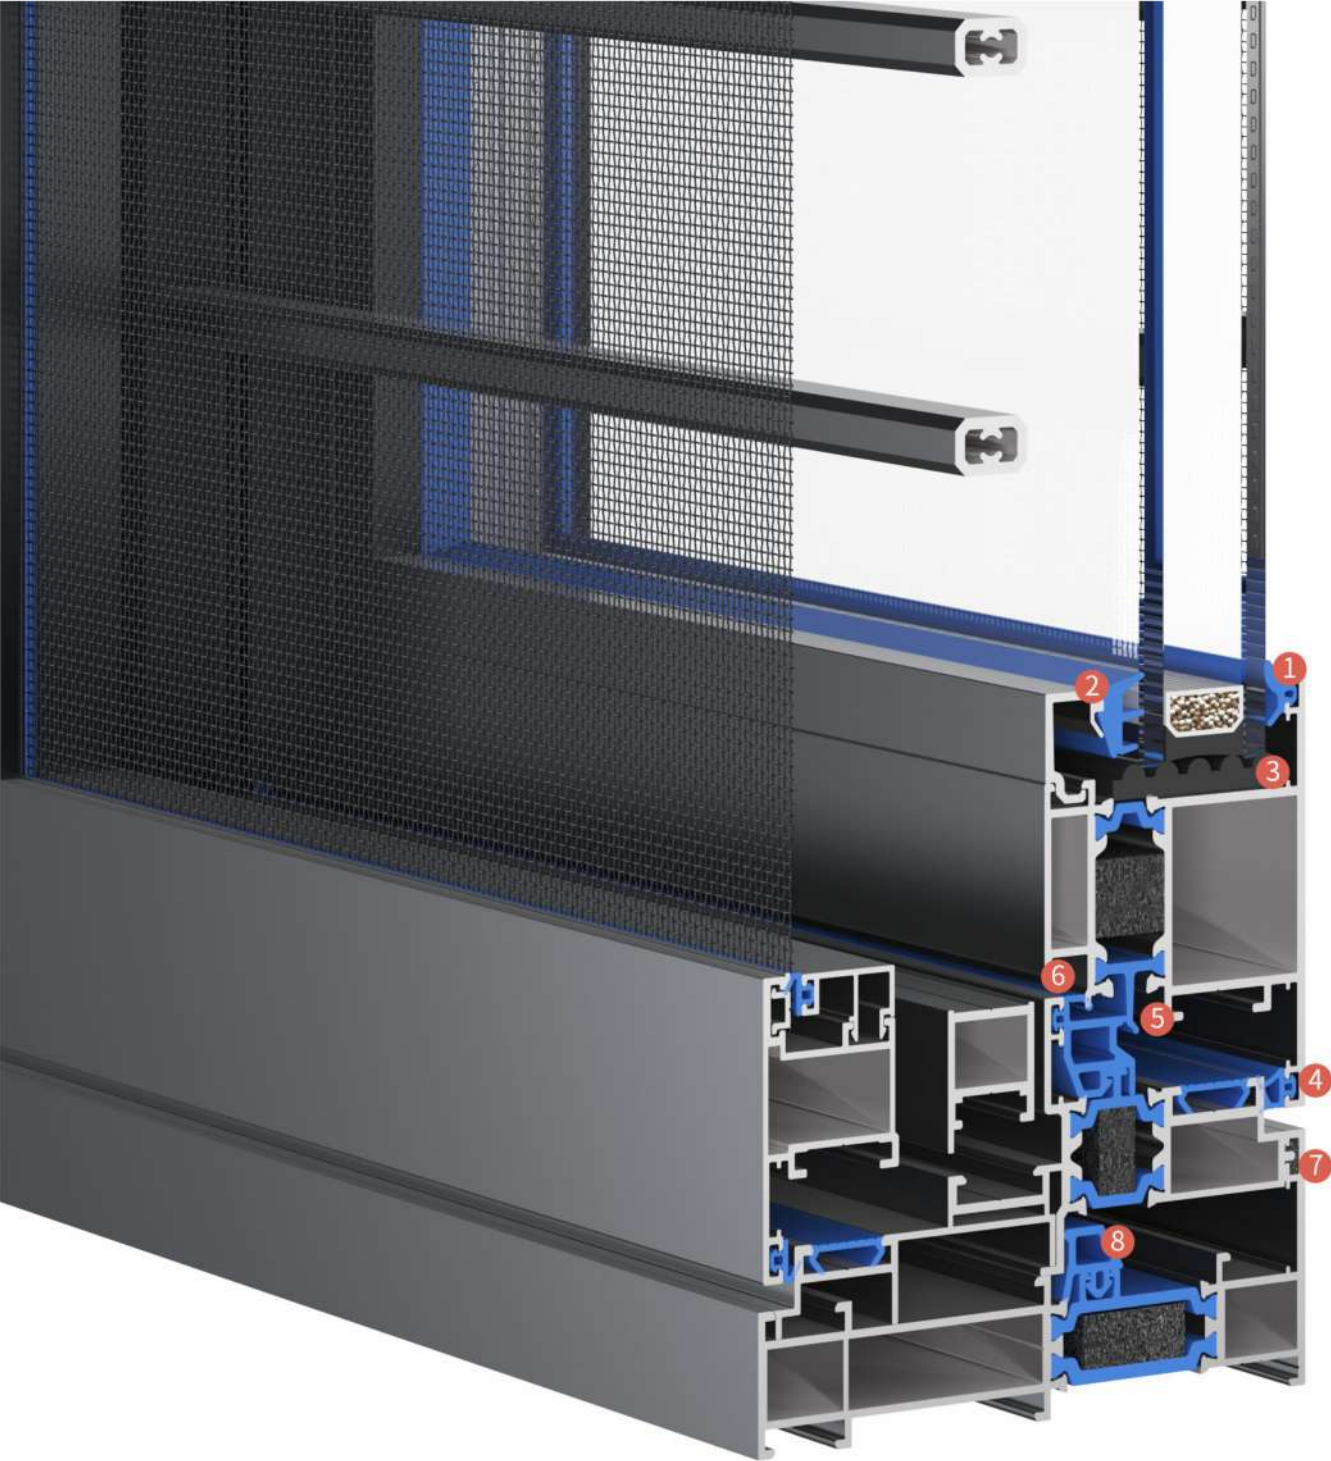

90S OUTWARD-OPENING WINDOW

Open all 8 seals to enhance the sealing of windows in all directions
Significant improvement in waterproof, dustproof,
and sound insulation effectsThe main sealing strip is welded to the entire frame,
making it more sturdy and durable

THE POST-90S GENERATION IS SIMPLE BUT NOT SIMPLE

Adopting a double height handle without a base
in line with ergonomic design The handle and frame
are in the same color scheme, enhancing visual and spatial sense



1CM ULTRA NARROW
VIEWING SURFACE,
OPEN PROTECTIVE
BARRIER

ULTRA CLEAR
DIAMOND MESH

OBLIQUE EDGE
PRESSURE
LINE DESIGN

190

生活 9

indow to th

ation

TAIFA



E9 CASEMENT WINDOW



E9 CASEMENT WINDOW

PRODUCT HIGHLIGHTS


- Complete set of imported hardware with excellent performance
- The five chamber structure is firmly constructed, providing a safety barrier
- Double corner protection for safer collision prevention
- Patent floor drain ladder drainage, upgraded drainage system
- Patent anti backflow sealing strip, upgraded waterproofing

PRODUCT SPECIFICATIONS


2.0mm	80*40mm	80x90x40mm
Main wall thickness	Outer frame	Mullion

100*65*40mm	5mm+20A+5mm
Sash width	Glass configuration

SELECTIVE COLOR

					
Flash Silver Grey	Starry Sky Grey	Gong Tingbai	Metal coffee	Thai Teak	Burmese rosewood



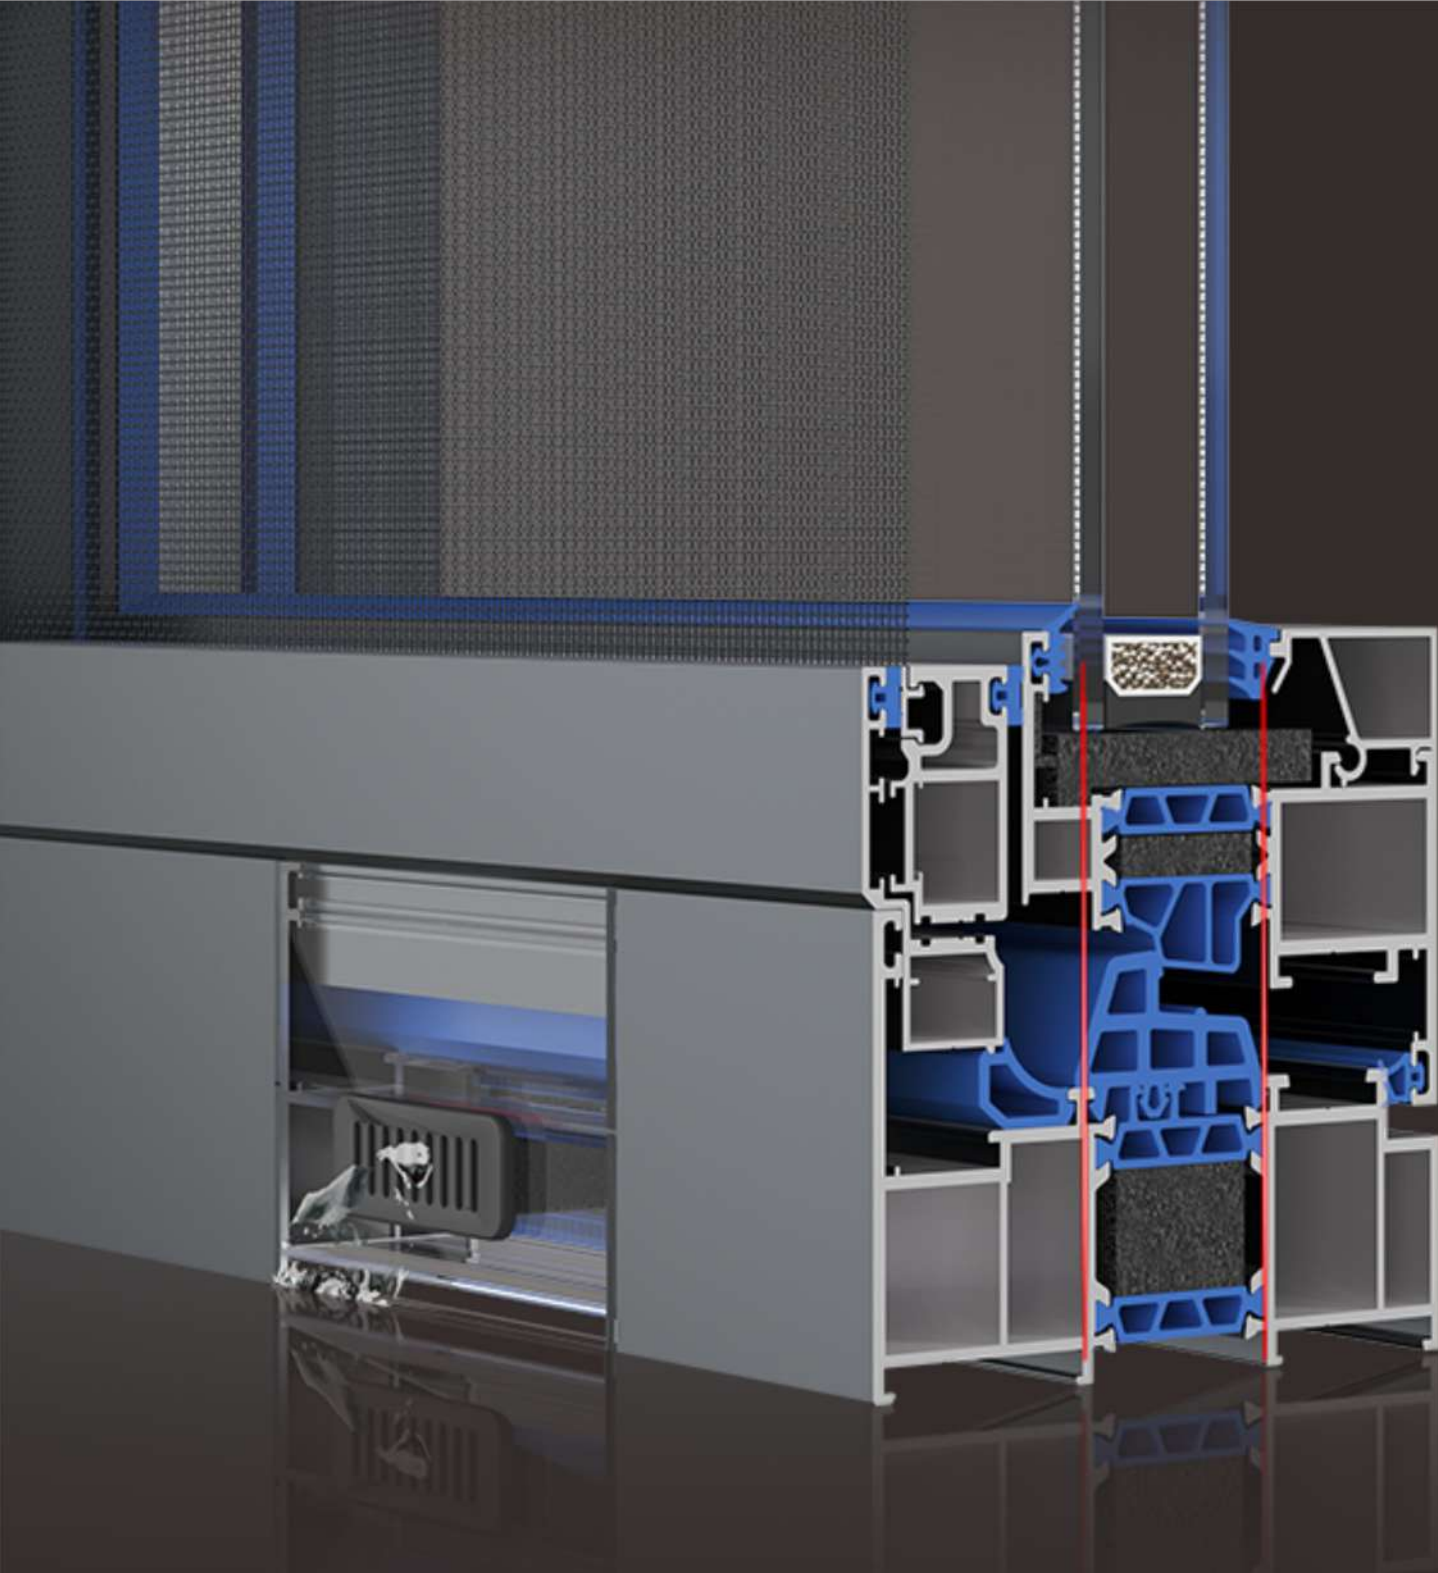

VERTICAL ISOTHERM


ENERGY CONSERVATION AND CONSUMPTION REDUCTION


The insulation strip, pressure sealing strip, and insulating glass are all on the same vertical line. Form an effective cold and hot bridge barrier. Reduce air heat conduction and lower indoor energy consumption.

THREE SEAL DESIGN

WIND AND RAIN DO NOT SEEP

Using high-quality EPDM sealing strips. The three seal design improves the sound insulation and thermal insulation of windows. Air tightness and water tightness ensure that the windows do not leak water.

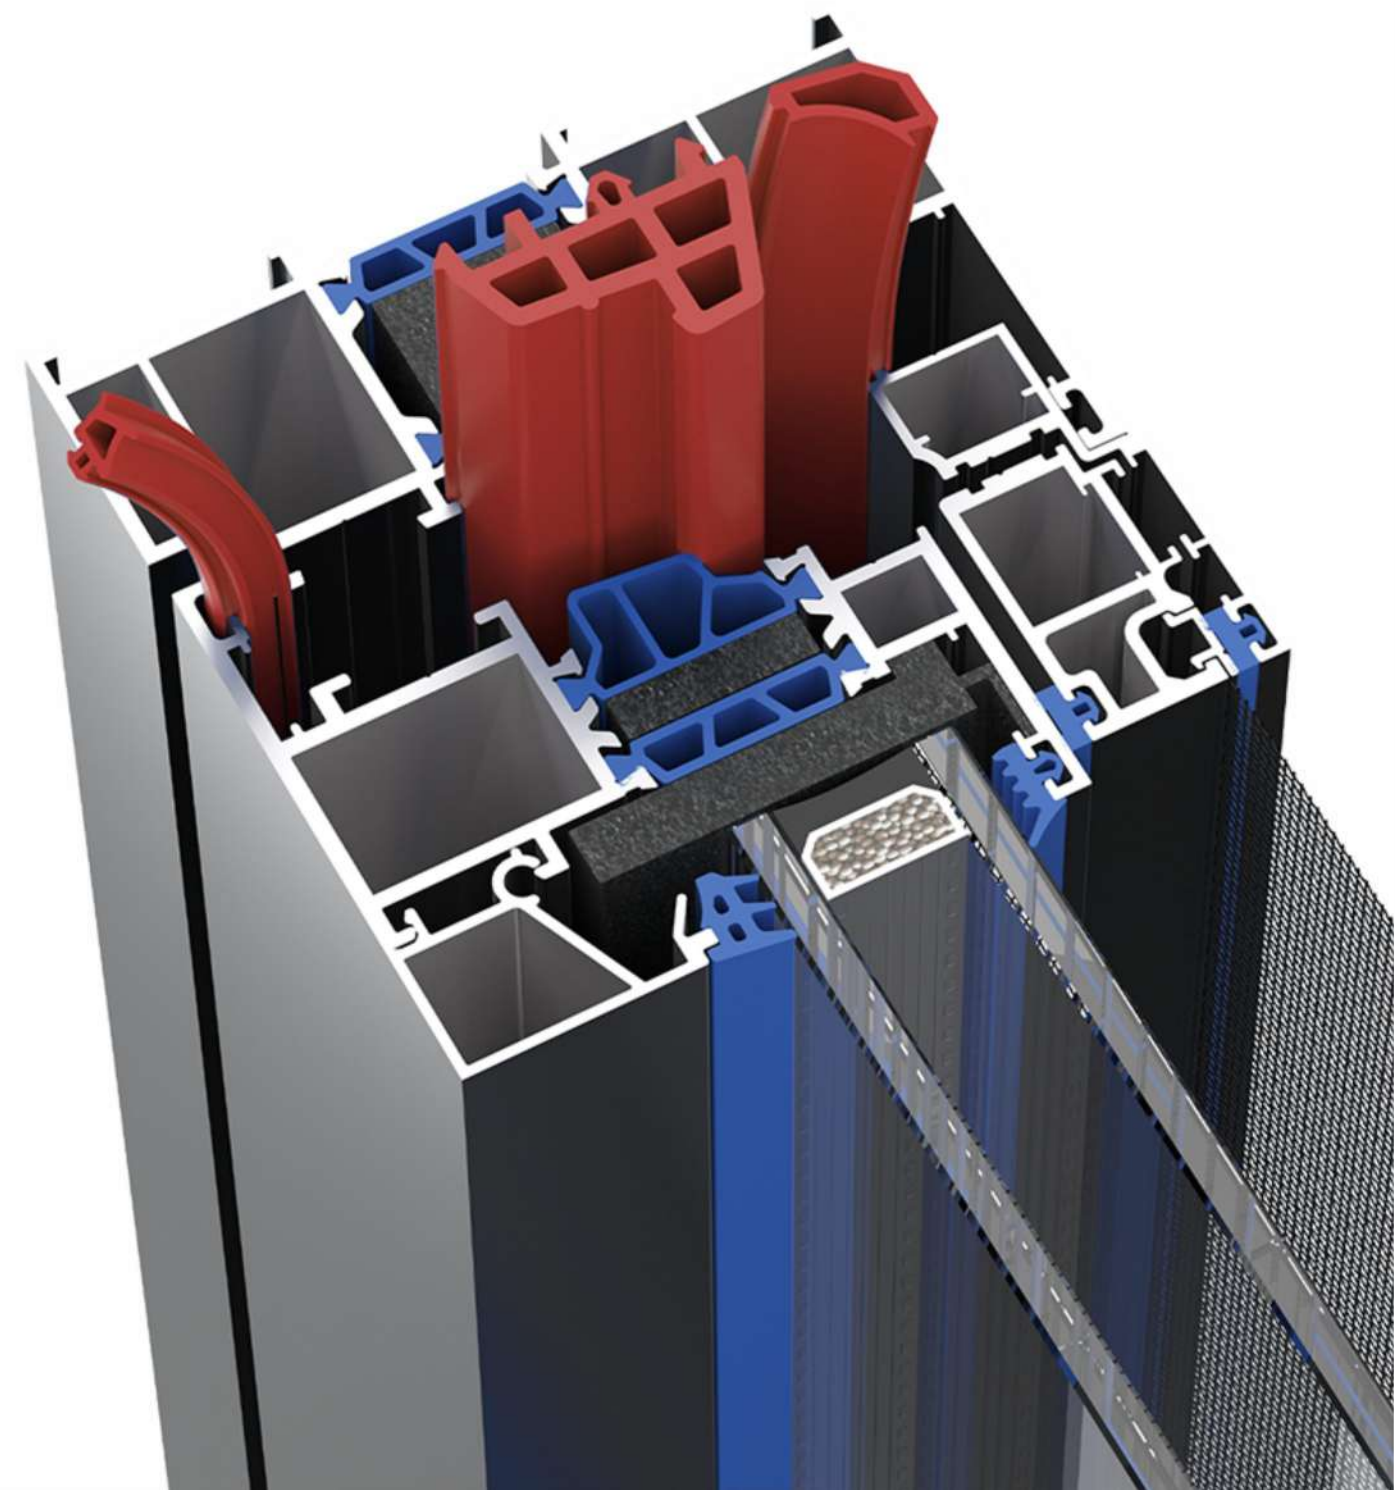

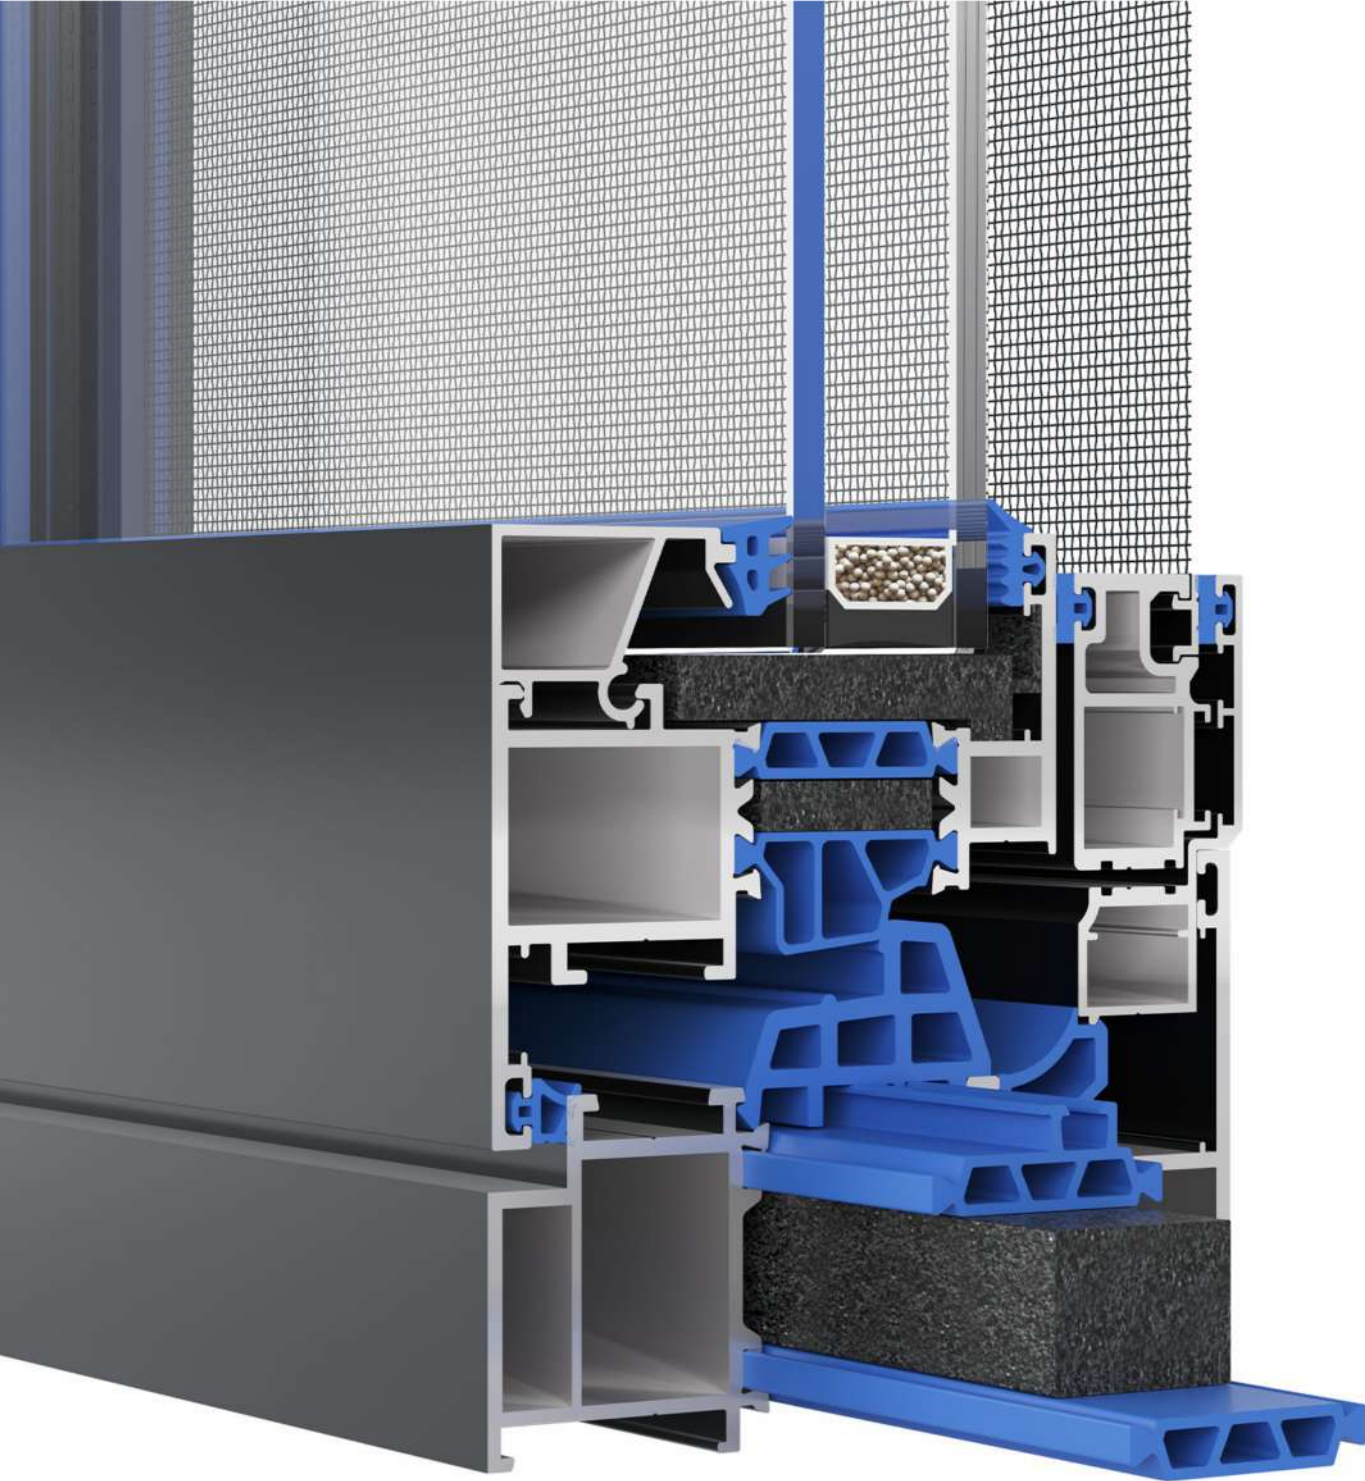

MULTI CAVITY INSULATION STRIP

BLOCK HEAT

30mm multi cavity insulation strip can effectively control heat convection between window frames Isolating heat transfer, its excellent tensile strength Make the overall performance of the window better and the structure safer

DOUBLE CORNER PROTECTION

ANTI COLLISION IS SAFER

Humanized design eliminates the occurrence of indoor water chestnut collisions Window sash R6 metal arc corner protector and PET anti-collision adhesive corner Protecting children's home safety



S9 CASEMENT WINDOW

PRODUCT HIGHLIGHTS


- Three glass and two hollow chambers, guarding the temperature of the home
- Multi chamber insulation strip, low-carbon and energy-saving
- Five cavity structure, building a strong safety barrier
- Patent floor drain ladder drainage, upgraded drainage system
- Patent anti backflow sealing strip, upgraded waterproofing

PRODUCT SPECIFICATIONS

2.0mm	110*65*40mm	110*90*40mm
Main wall thickness	Outer frame	Mullion

67*36.5*84.5mm	5mm+12A+5mm +12A+5mm
Sash width	Glass configuration

SELECTIVE COLOR

					
Flash Silver Grey	Starry Sky Grey	Gong Tingbai	Metal coffee	Thai Teak	Burmese rosewood





S9 CASEMENT WINDOW






THREE GLASS TWO CAVITY HOLLOW


GUARDING THE TEMPERATURE OF THE HOME

Equipped with three glass and two cavity insulated glass as standard, it has excellent insulation performance. Good anti condensation properties, compared to traditional two glass insulated glass. Three glass and two cavity insulated glass can improve noise reduction rate. Enhance by 25% to 33% to isolate the noise from the outside.

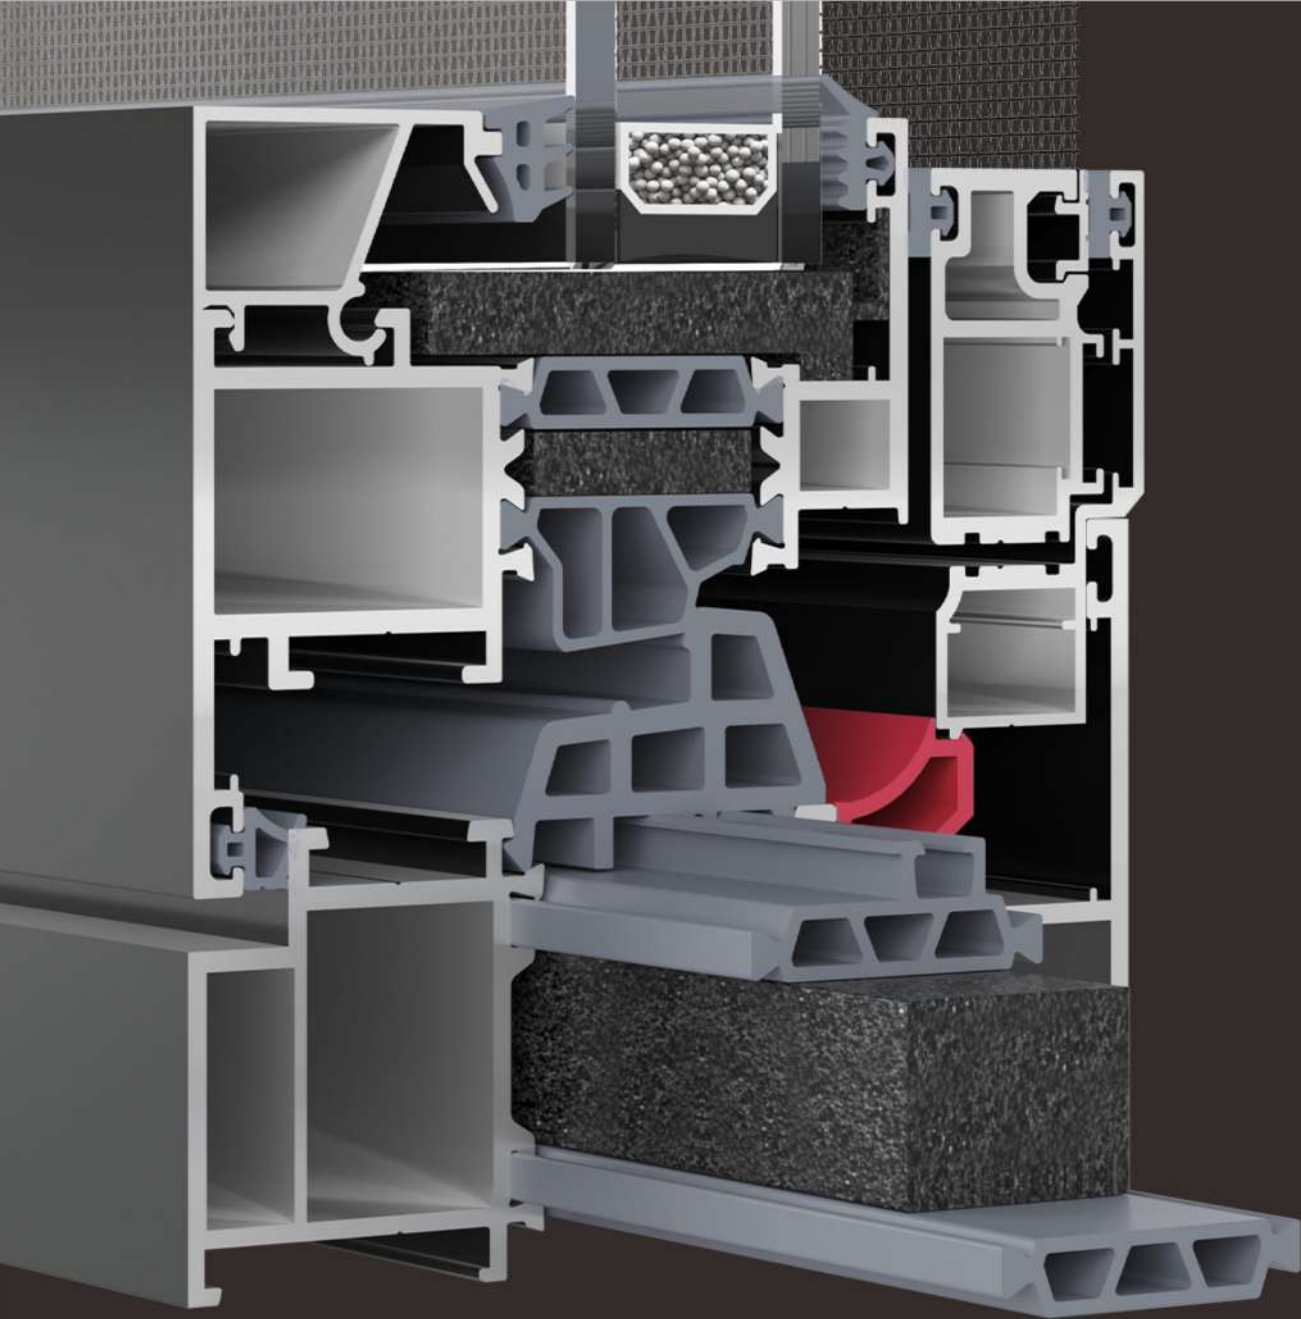

ANTI BACKFLOW SEALING STRIP WATERPROOF UPGRADE

Innovative design, patented anti backflow sealing strip to prevent rainwater backflow. Eliminate window leakage and protect the home environment from rainwater intrusion.

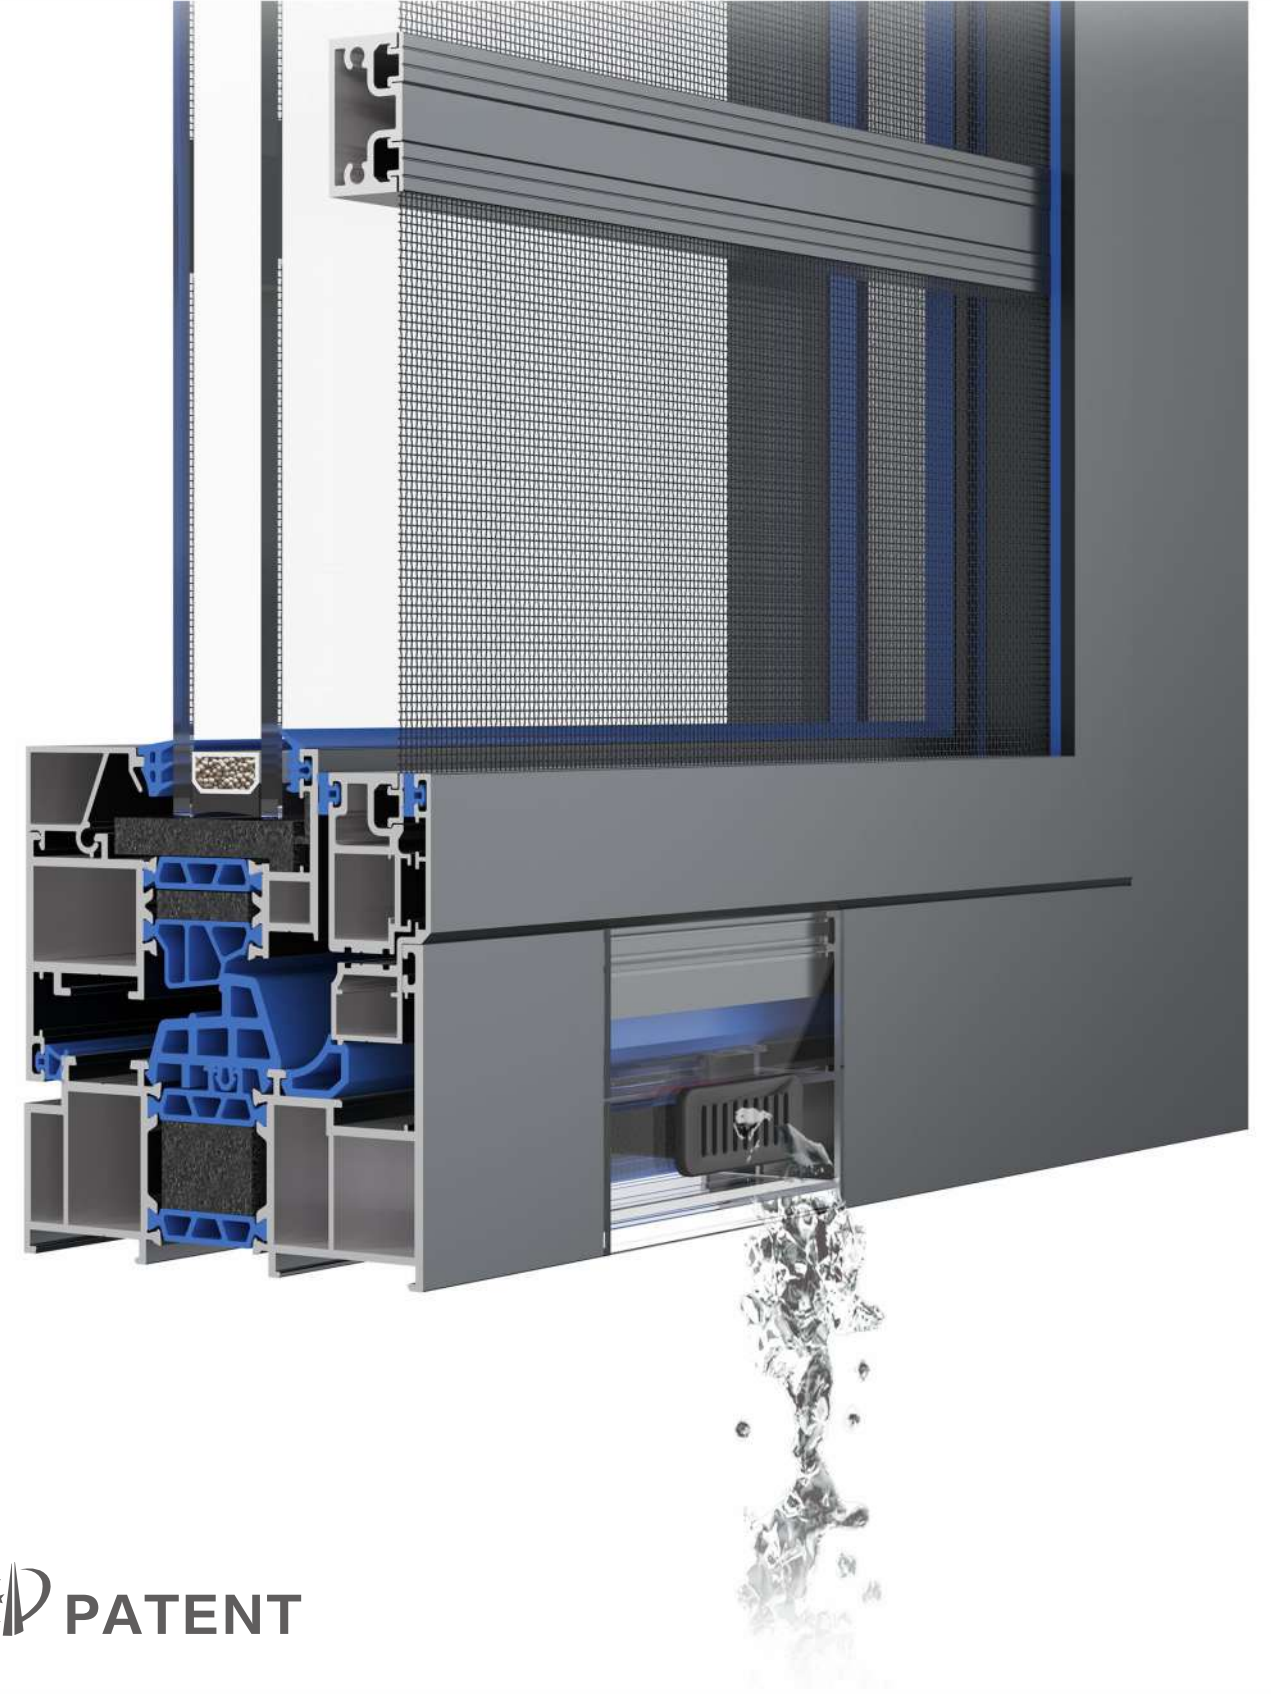

UPGRADED FLOOR DRAIN LADDER DRAINAGE SYSTEM

Adopting the latest developed floor drain ladder drainage system. Smooth drainage, anti reverse pressure difference, fearless of storms. Eliminate rainwater backflow and prevent wind whistling from windows.

6-TRACK SLIDING WINDOW

PRODUCT HIGHLIGHTS


- 120MM Landscape Handrail Design
- Large narrow edge hidden fan design
- 6-track double row silent pulley
- Side mounted touch automatic lock, reflecting craftsmanship in quality
- Track and device fence effectively improve space utilization

PRODUCT SPECIFICATIONS

2.0mm	130*55mm	25*125.6mm
Main wall thickness	Outer frame	Mullion

32*30mm	5mm+20A+5mm
Sash width	Glass configuration

SELECTIVE COLOR

						
Flash Silver Grey	Starry Sky Grey	Gong Tingbai	Metal coffee	Thai Teak	Burmese rosewood	Champagne Gold






6-TRACK SLIDING WINDOW





SIDE MOUNTED
TOUCH AUTOMATIC
LOCK

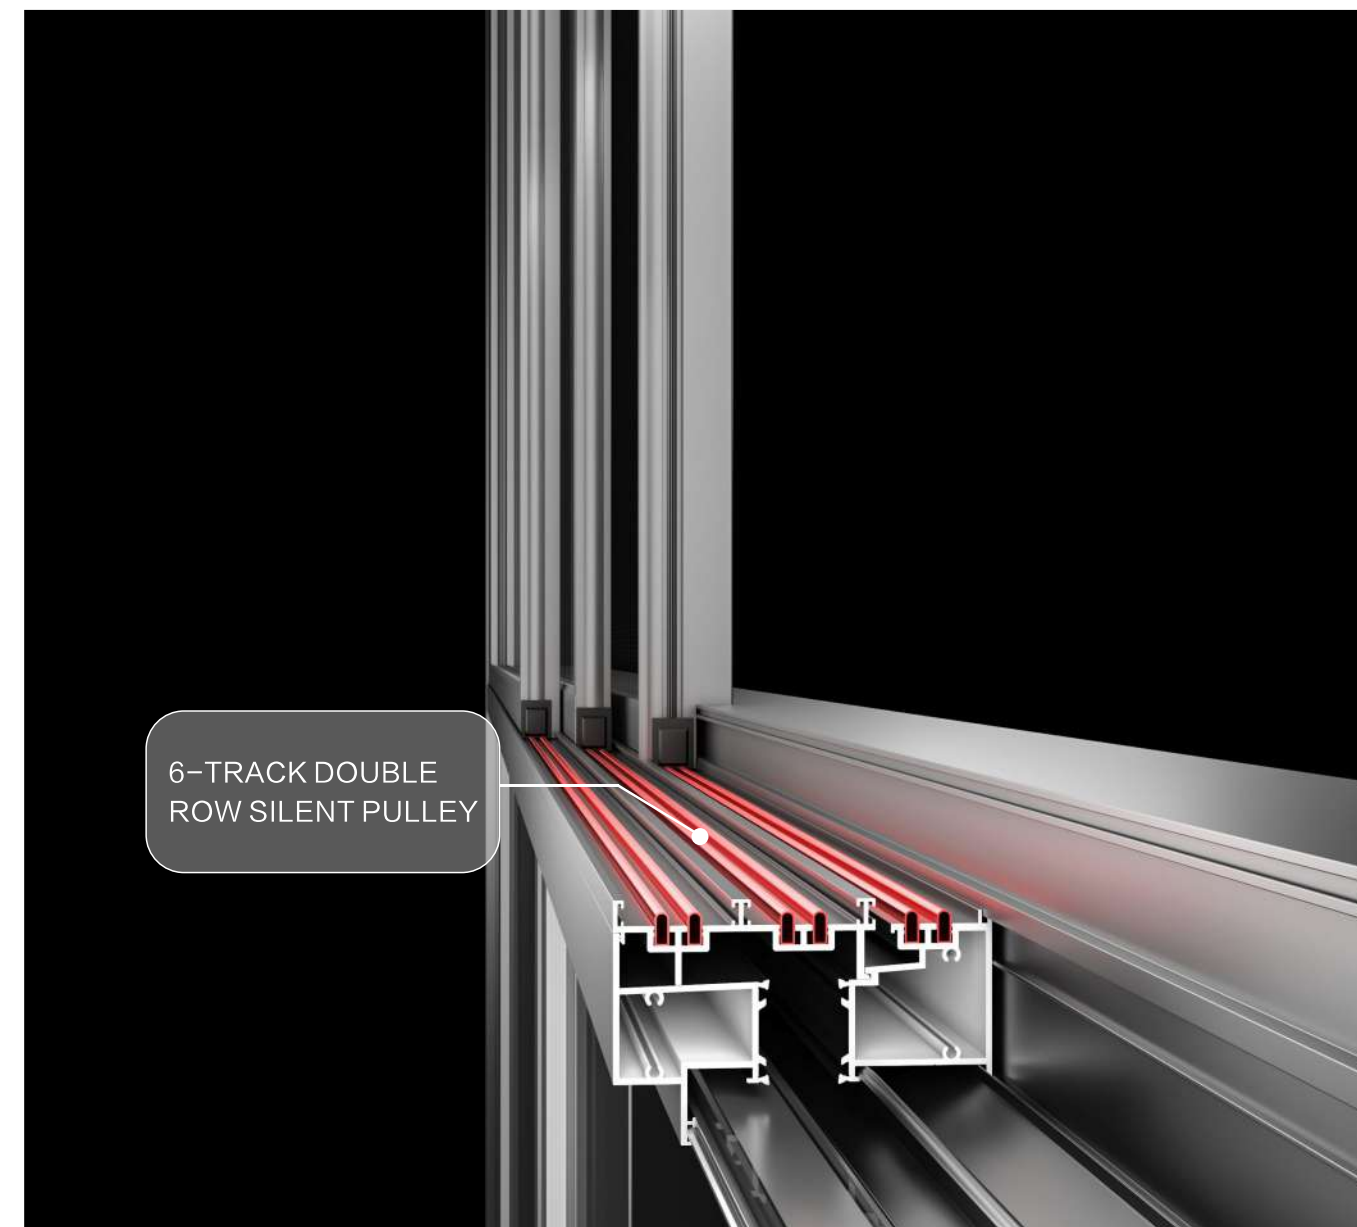

6-TRACK DOUBLE
ROW SILENT PULLEY

6-TRACK DOUBLE ROW SILENT PULLEY

STABLE LOAD-BEARING, SMOOTH PUSHING AND PULLING, SILKY SMOOTH

Adopting a 6-speed stainless steel track, the double track has better load-bearing capacity and smoother pushing and pulling, 304 stainless steel material is wear-resistant and corrosion-resistant, with a longer service life. At the same time, provide more options for adding accessories.

LARGE NARROW
EDGE HIDDEN FAN
DESIGN

120MM LANDSCAPE
HANDRAIL DESIGN

TRACK AND
DEVICE FENCE



GUARDIAN SIDE SLIDING WINDOW

PRODUCT HIGHLIGHTS


- Squeezing seal, impervious to wind and rain
- Surrounding locking system, sealed and anti-theft
- Double broken frame bridge design, efficient insulation and heat preservation
- Double track and double pulley design, smooth push-pull and high load-bearing capacity
- Six chamber structure design, more stable wind pressure resistance

PRODUCT SPECIFICATIONS

2.0mm	126*51*32mm	68.6*69.4*31.4mm
Main wall thickness	Outer frame	Mullion

68*55mm	5mm+22A+5mm
Sash width	Glass configuration

SELECTIVE COLOR

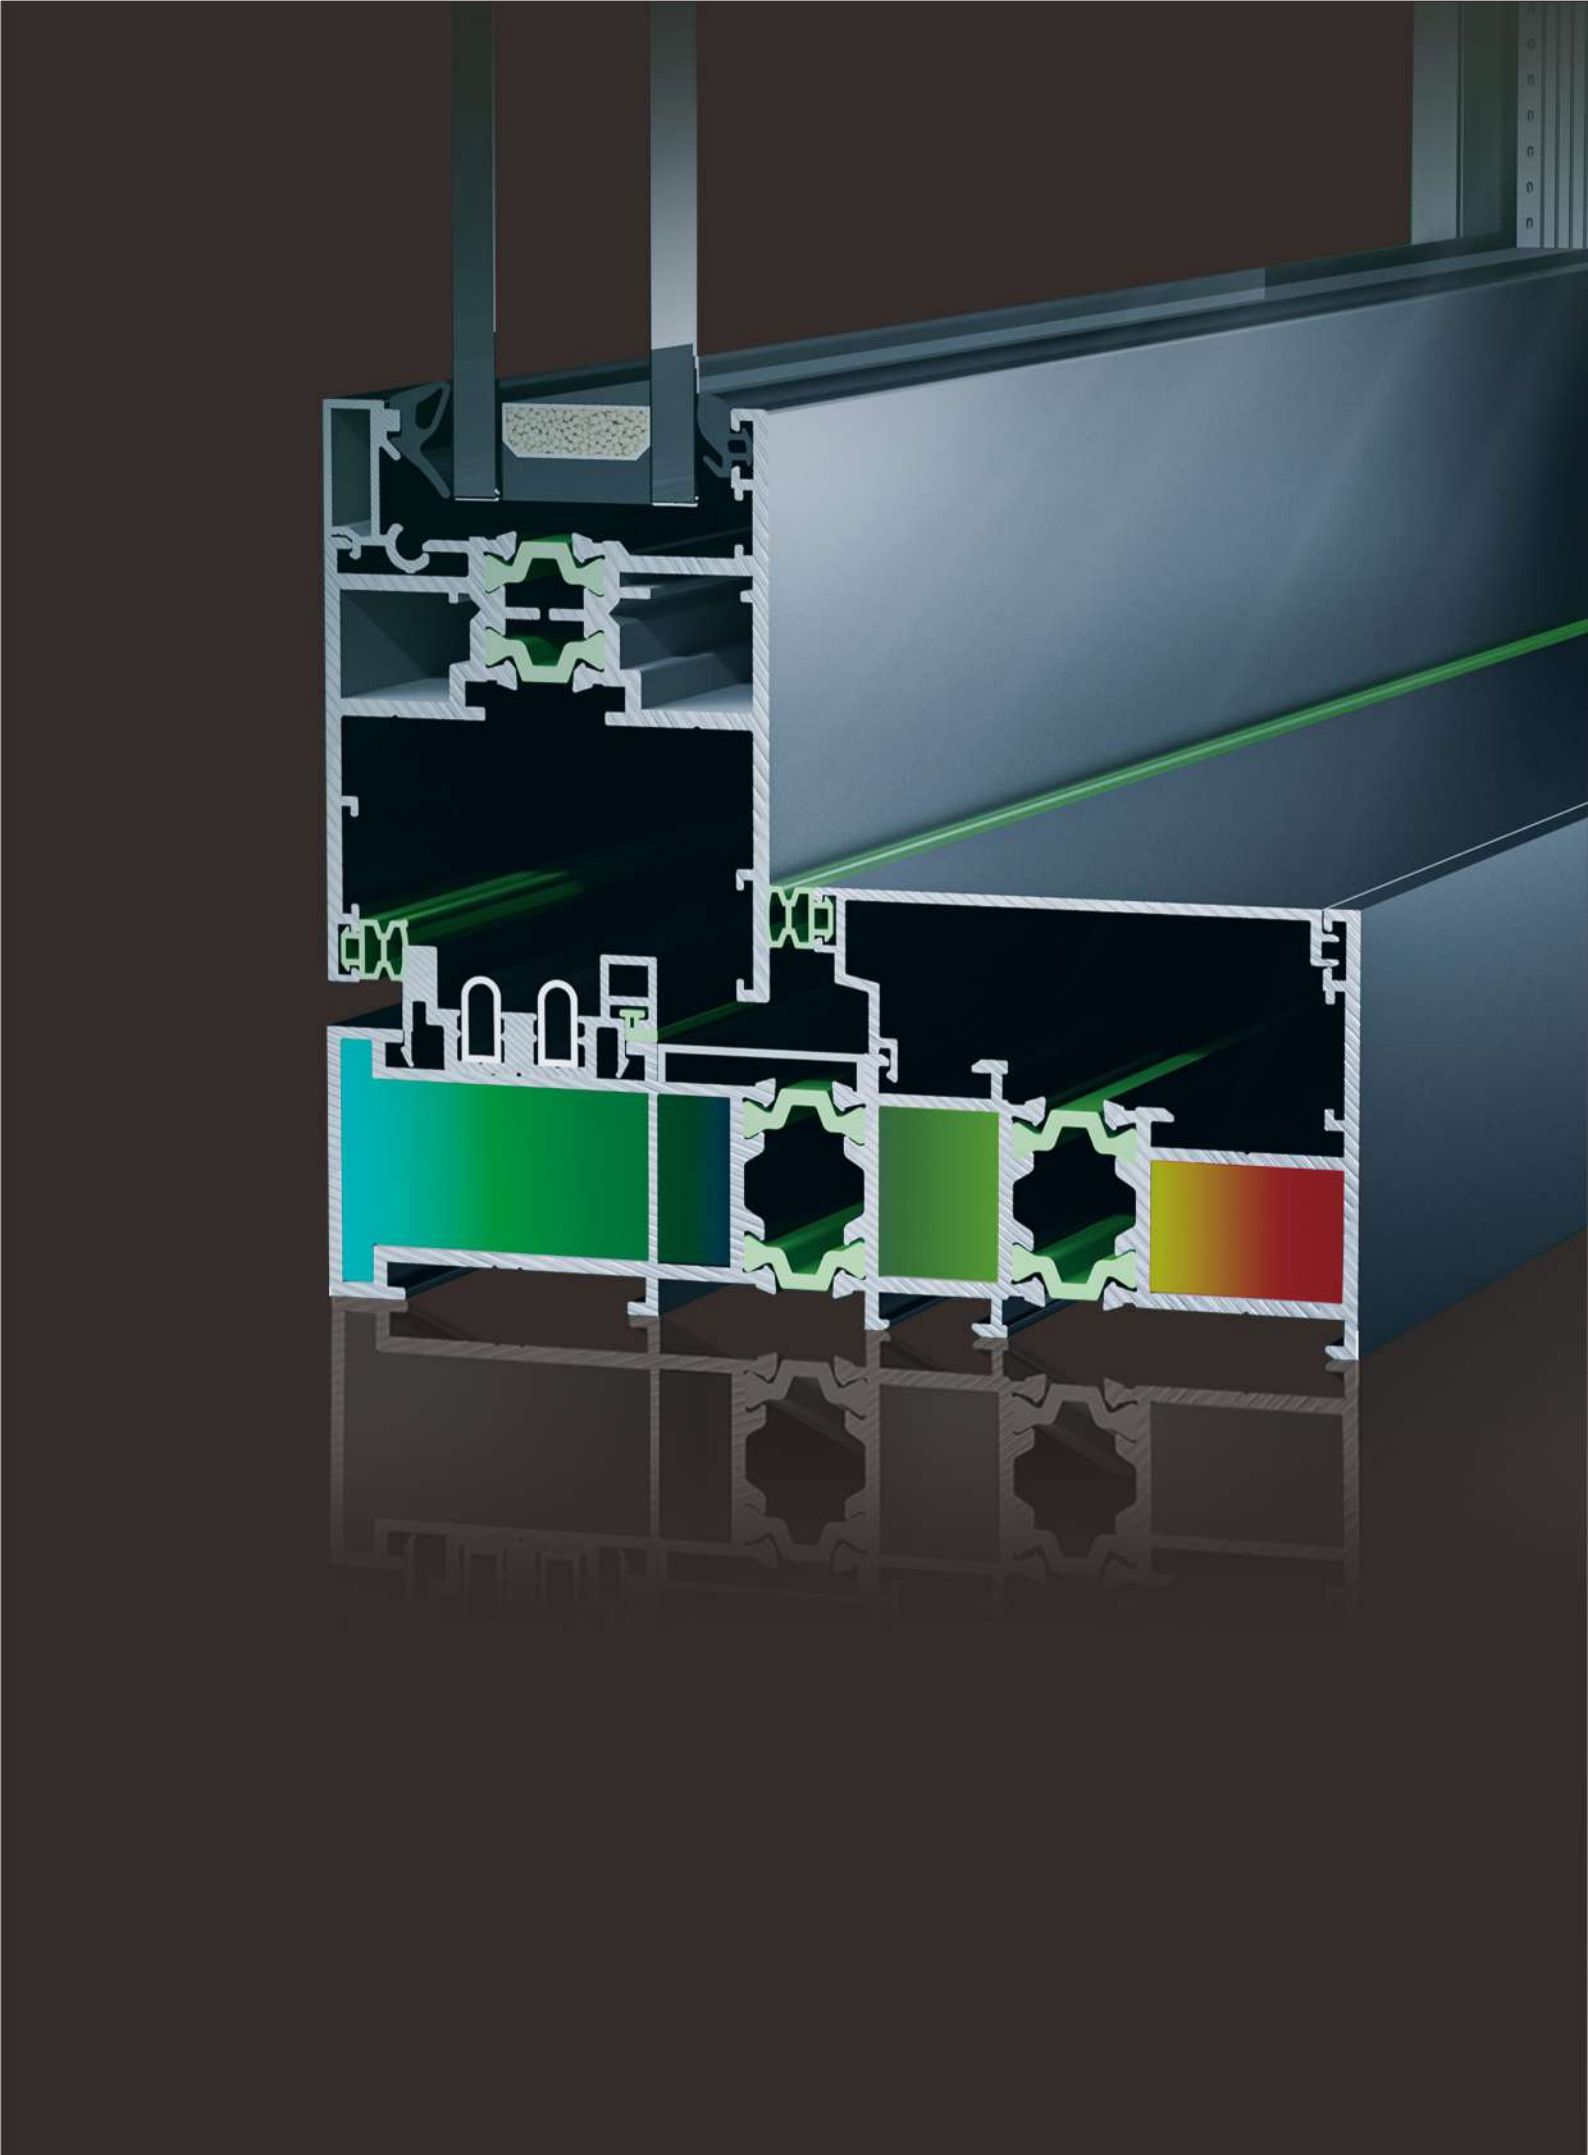



GUARDIAN SIDE SLIDING WINDOW




**SQUEEZING TYPE SEAL,
WIND AND RAIN RESISTANT**

Install sealing strips around the window sash Rotate the handle 180 ° and press the entire fan inward by 5mm Ensure that the closed state is tightly sealed to achieve submarine level sealing The wind and rain are impermeable, so that you no longer worry about the storm



**SURROUNDING LOCKING SYSTEM
SEALED AND ANTI-THEFT**

The entire fan has a multi lock point structure which is uniformly stressed and does not deformTightly closed for better sealing effectAnd it has strong anti-theft performance, making the windows more secure

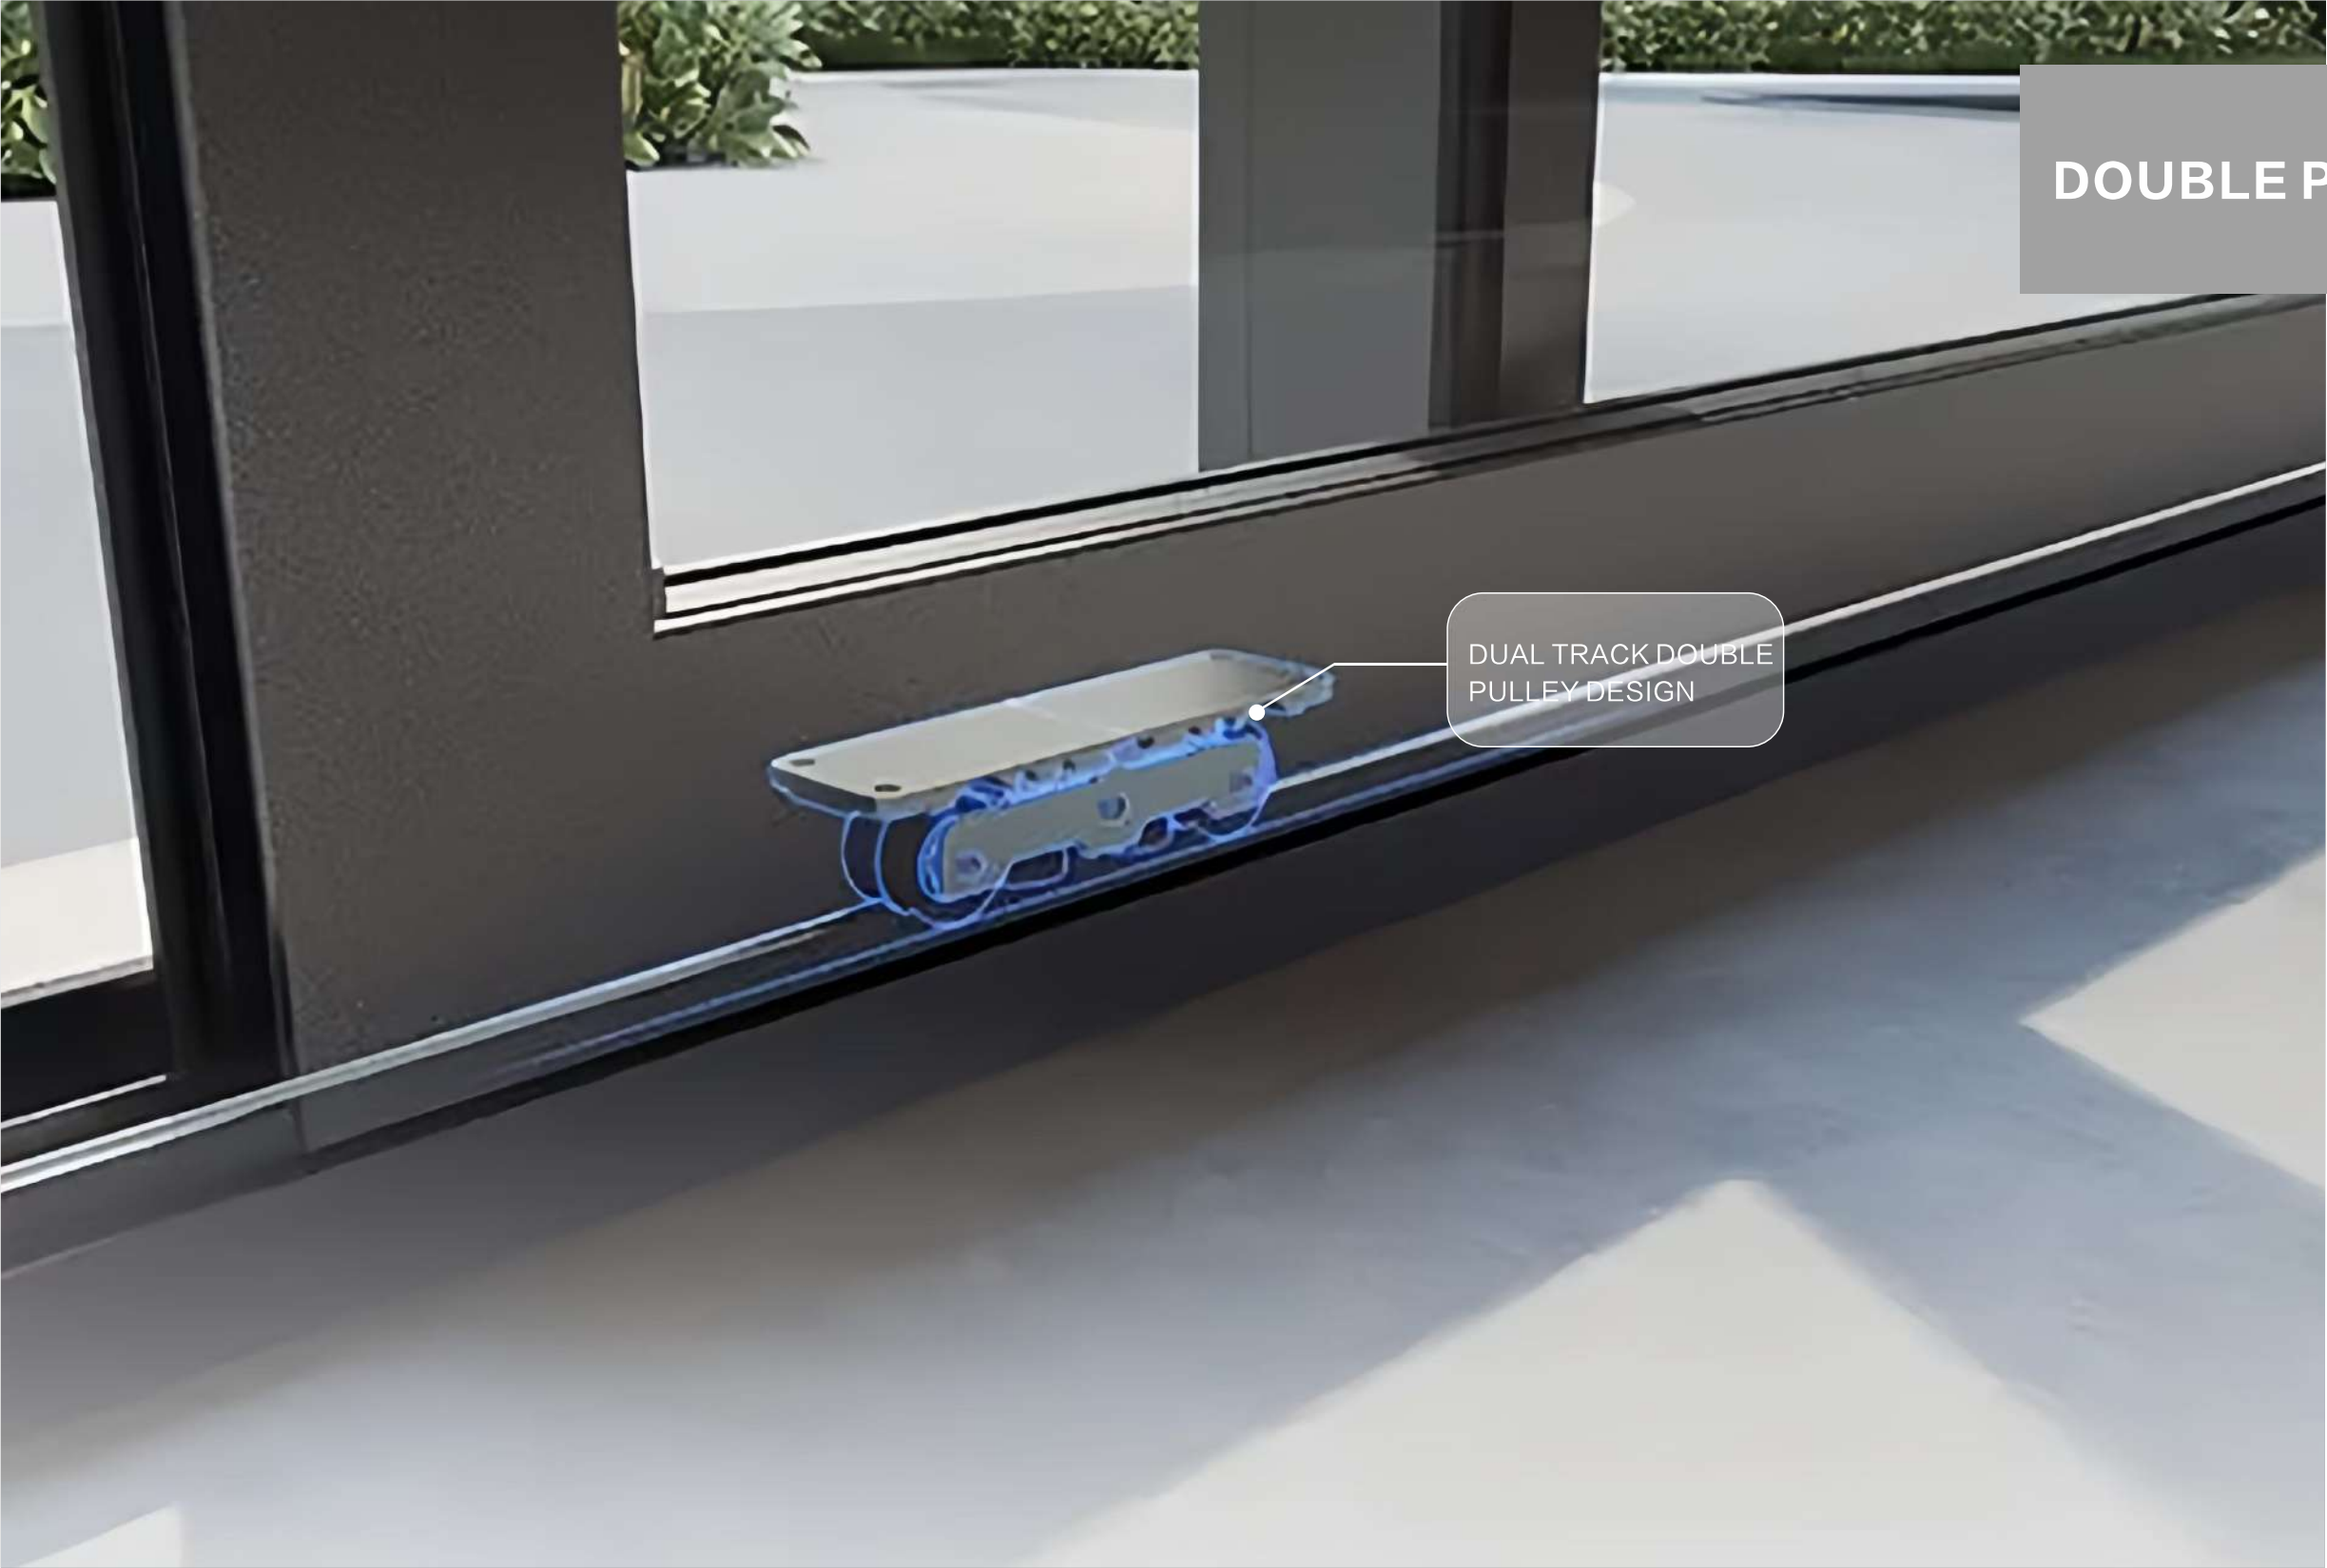

DOUBLE PULLEY

DUAL TRACK DOUBLE
PULLEY DESIGN

**DUAL TRACK DOUBLE PULLEY
DESIGN SMOOTH PUSH-PULL
AND HIGH LOAD-BEARING CAPACITY**

The lower track adopts a dual track design,
which improves the weighing performance of the door leaf. The
push-pull process is smoother and more stable. Greatly improves the
user experience of windows and extends their lifespan.



ULTRA HIGH DESIGN

BREAKING THROUGH THE HEIGHT LIMIT BOTTLENECK UP TO 2.8M

Based on its sturdy structural strength, the window sash can be raised Up to 2.8m in height, from the roof all the way to the ground Perfectly solves the limitation of the balcony's floor to ceiling glass not reaching the top

DREAM MAX SMART LIFT WINDOW


PRODUCT HIGHLIGHTS

- *50% extra-wide opening area for unobstructed views and ventilation in one go
- * Motorized system ensures stable and precise operation
- *Exceptional load-bearing capacity with a sturdy, durable structure
- *Smart controls for versatile, effortless operation
- *Features intelligent infrared anti-pinch technology that stops immediately upon detecting an obstruction

PRODUCT SPECIFICATIONS

5.0mm	50mm	8mm+16A+8mm
Main wall thickness	Width of glass panel	Glass configuration

SELECTIVE COLOR

							
Flash Silver Grey	Starry Sky Grey	Gong Tingbai	Metal coffee	Thai Teak	Burmese rosewood	Champagne Gold	Anthra-zinc

PANORAMIC AESTHETIC DESIGN: 180° UNOBSTRUCTED VIEW

Extremely narrow border+oversized glass,
offering IMAX level landscape views

180°





DREAM MAX SMART LIFT WINDOW



FIVE-DIMENSIONAL SAFETY PROTECTION: SMART ANTI-PINCH 3.0 SYSTEM

Infrared+pressure+load-bearing triple sensingEmergency
stop in 0.1 seconds when encountering obstacles,
children and pets can be protected with peace of mind

1 FIVE-DIMENSIONAL SECURITY PROTECTION WIND AND RAIN AI BUTLER

Real time monitoring of environmental changesRainstorm and
strong wind automatically close the window,
and remote APP can check the log


2 FIVE-DIMENSIONAL SAFETY PROTECTION: CUTTING-EDGE TECHNOLOGY FOR POWER-OFF BATTERY LIFE

Optional 24V emergency power supplyNormal operation
can still be carried out after 15 days of power outage,
and unexpected situations can be handled calmly



Hardcore Drive System: Military-Grade Transmission Assembly

Our independently developed servo motor and precision planetary gearbox are the golden partners,Achieve 10000 hours of trouble free operation, with a load capacity of 450kg and still silent like feathers.




1 HARDCORE DRIVE SYSTEM: DUAL-CHAIN ARMOR STRUCTURE

High precision carbon steel double row sprocket meshing transmission, zero slip precise lifting and lowering450kg super strong load-bearing capacity, increased tensile strength by 300%, as stable as a rock

2 HARDCORE DRIVE SYSTEM: HIGH-PRECISION ANTI-WOBBLE WHEEL

Choose high-end customized anti sway wheels to enhance flexibility and stabilitySmooth and silent, powerful, safe and stable

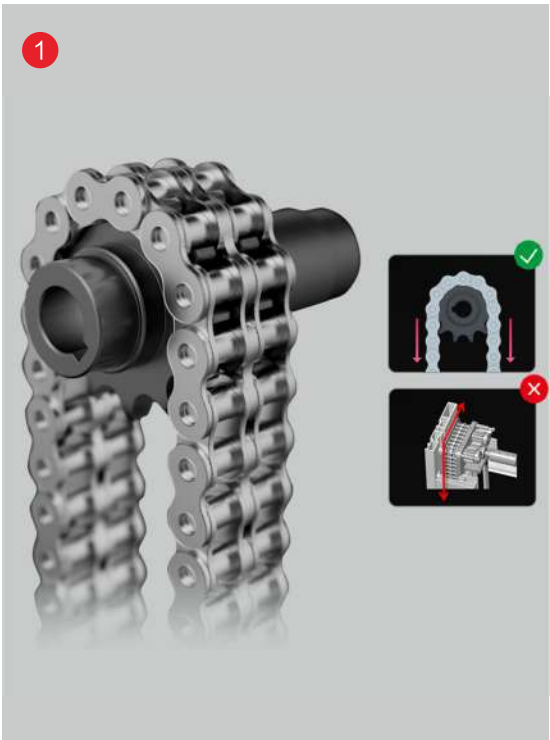

Smart Living Kit

Support voice control/APP/remote control/
panel four-dimensional controlOne click
linkage of screen windows, lighting, and curtains



App Remote Control



RF remote control



Perception of
the Natural Environment



LCD touch panel



Speech
Recognition System



DREAMER FOLDING DOOR


PRODUCT HIGHLIGHTS

- Unique opening method
- Can fully open the balcony space
- Superior Kaisenberg accessories
- Can be freely combined to meet spatial requirements

PRODUCT SPECIFICATIONS

1.5mm Main wall thickness	77*53mm Outer frame
68*62mm Sash width	5mm+12A+5mm Glass configuration

SELECTIVE COLOR

							
Flash Silver Grey	Starry Sky Grey	Gong Tingbai	Metal coffee	Thai Teak	Burmese rosewood	Champagne Gold	Anthra-zinc





**DREAMER
FOLDING DOOR**

THERMAL BREAK SLIDING DOOR

PRODUCT HIGHLIGHTS


- New national standard profile wall thickness
- Solid glass large hollow: 5+27A+5
- Can be used for high rail, low rail, and copper rail
- German Gewu complete hardware system

PRODUCT SPECIFICATIONS

2.2mm	131/196mm Second rail/Third rail
Main wall thickness	Outer frame

75*53/30.8*53mm	5mm+22A+5mm
Sash width	Glass configuration

SELECTIVE COLOR

							
Flash Silver Grey	Starry Sky Grey	Gong Tingbai	Metal coffee	Thai Teak	Burmese rosewood	Champagne Gold	Anthra-zinc





**THERMAL BREAK
SLIDING DOOR**

IS135 SLIDING DOOR

PRODUCT HIGHLIGHTS

- The most perfect hidden track system solution
- Extremely narrow visible surface 20mm
- The most ideal outdoor narrow door locking solution
- Can be manually or electrically operated, with flexible control
- Ultra high and wide design, suitable for use on large balconies

PRODUCT SPECIFICATIONS

2.0mm Main wall thickness	75/135/197mm (single track/2-track/3-track) Outer frame(sliding door)	135mm Outer frame(sliding window)
50/20mm Door hook stile	55/30mm Window hook stile	5mm+24A+5mm Glass configuration

SELECTIVE COLOR


Flash Silver Grey


Starry Sky Grey


Anthra-zinc







IS135 SLIDING DOOR



**THE SMALLEST GAP
BETWEEN HIDDEN SEAMS**

A 4mm internal concealed rail gap effectively isolates 80% of dust, Stones and other materials enter the track, keeping it clean and smooth, At the same time, the track split type detachable cover plate facilitates cleaning and cleaning under the track.

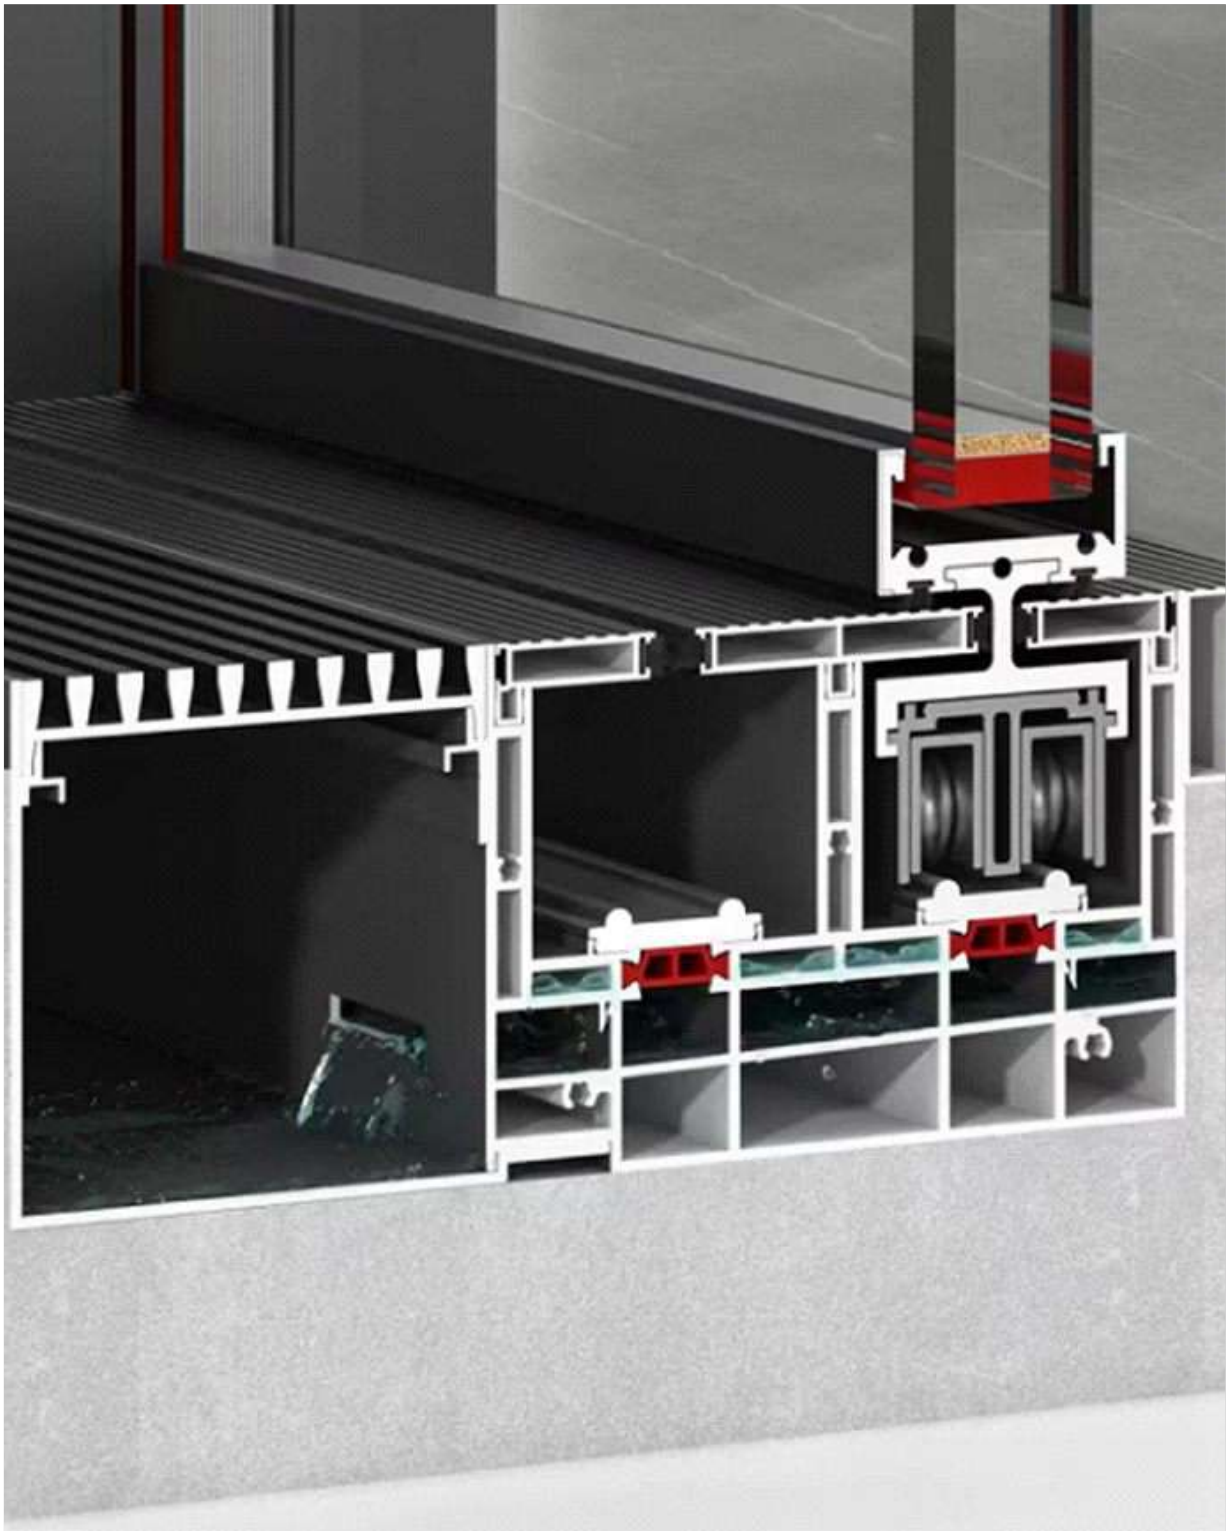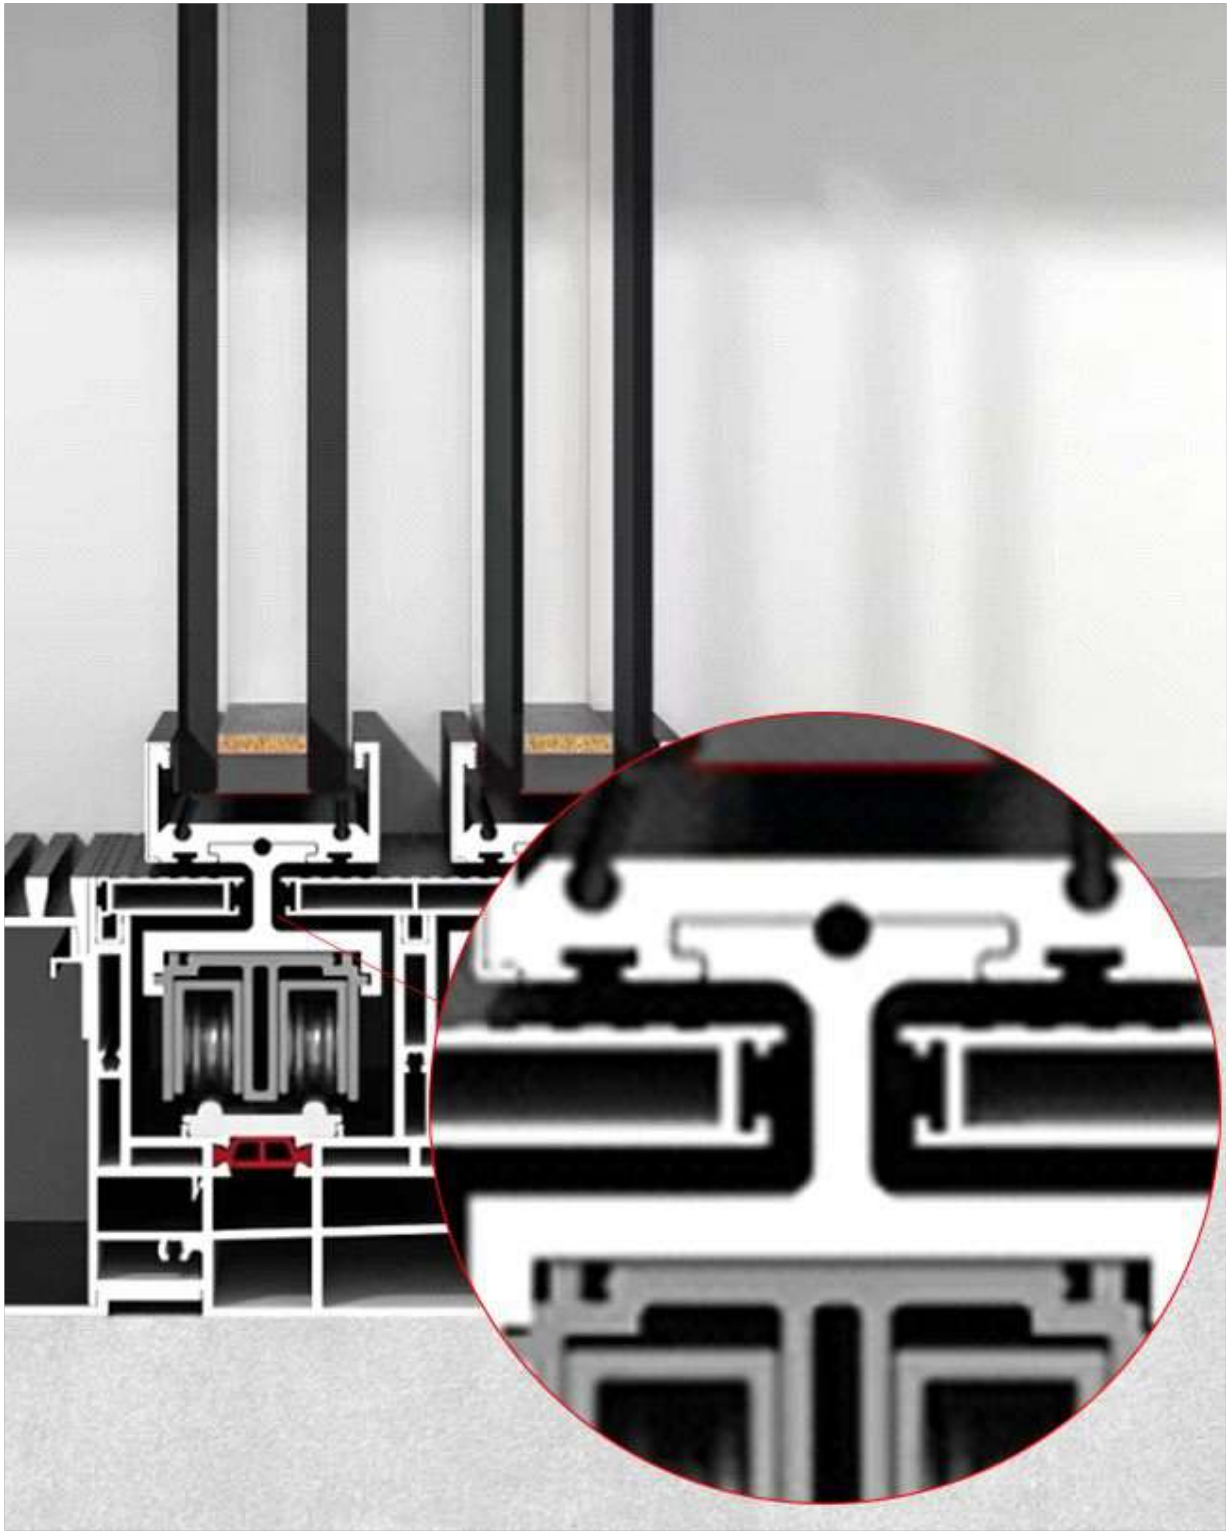

**THE PERFECT HIDDEN
TRACK SYSTEM**

Concealed track design, with a completely flat surface and a strong sense of unity
Accessible and equipped with super strong load-bearing self balancing
double row pulleys, Minimalist and beautiful, smooth and easy to push and pull
unleashing vision, and enjoying clear and transparent tranquility



EXTREMELY NARROW VISIBLE SIZE

ULTRA NARROW LIGHT DESIGN REDUCES VISUAL CROWDING,AFTER CLOSING,
ONLY 20MM/30MM WIDE HOOKS ARE EXPOSED,
A TRUE PANORAMIC VIEW, CREATING A RELAXED AND UNRESTRICTED HOME FOR YOU.

S3 INTERIOR DOOR


PRODUCT HIGHLIGHTS

- *12mm ultra-slim profile, with clean lines that define modern spatial aesthetics
- *Exclusive fully concealed top track design
- *Two-way damping system ensures gentle, smooth opening and closing, effectively preventing collisions and pinching
- *OPK Perfect System accessories support any combination of tracks

PRODUCT SPECIFICATIONS

2.5mm Main wall thickness	46/92/138mm (Monorail/Two Rail/Three Rail) Outer frame
12*/40mm Sash width	Single layer 8mm white glass Glass configuration


SELECTIVE COLOR

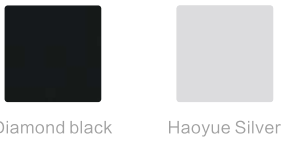



S3 INTERIOR DOOR



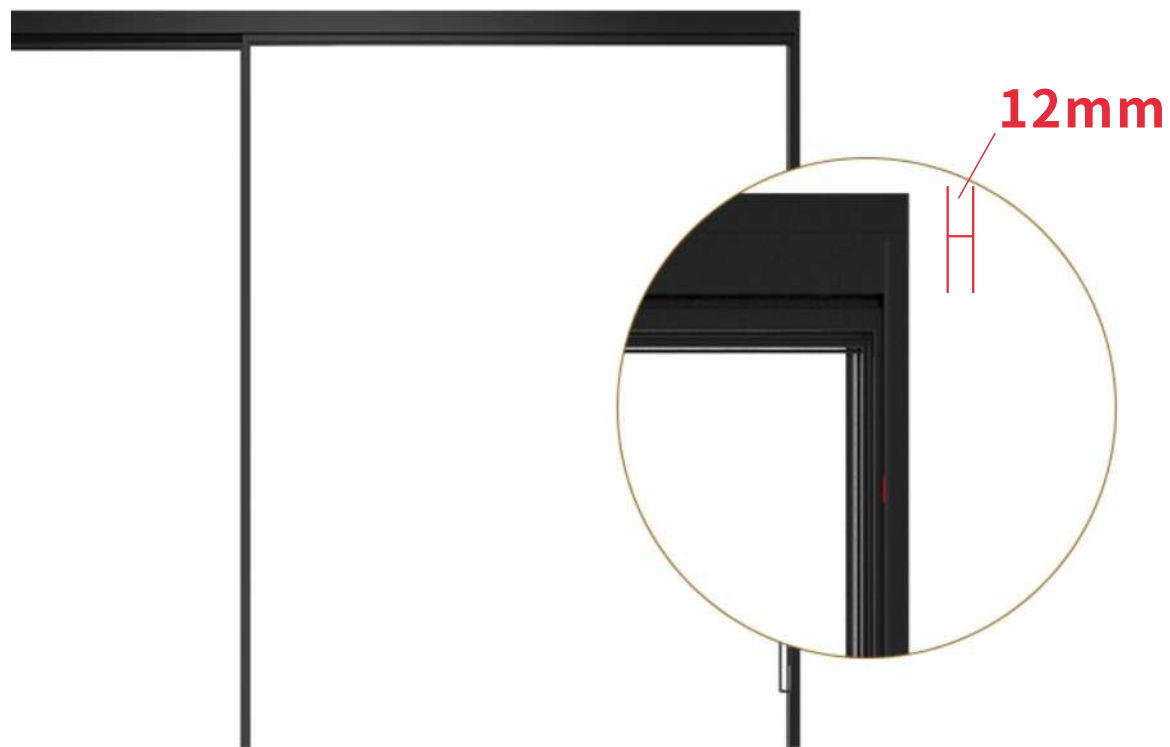

12MM ULTRA-NARROW FACE

The sleek, streamlined design aligns with current minimalist trends, infusing the space with a sense of sophisticated style.

**PUSH FROM
BOTH SIDES UNTIL EVEN**



FLEXIBLE COMBINATIONS


DESIGNED TO MEET DIVERSE SPATIAL NEEDS

ANY COMBINATION UNLOCKS


Comes standard with OPK Perfect System accessories, compatible with 8 door types, and features extended functionality. Flexibly adapts to different scenarios.




Side-by-side refrigerator



Interlocking doors




Open the door




Pocket door




The Ghost Gate



Swing door



Central Door



Folding door

VERSATILE OPTIONAL FEATURES

- Optional central-axis folding design
- Fits into extremely narrow spaces
- Optional electric track
- Upgraded servo motor
- Simple and stable operation



INTERIOR S3 FLAT DOOR

PRODUCT HIGHLIGHTS

- *Seamless fit, a serene private retreat
- *Smooth, effortless opening and closing
- *Concealed hinges for a clean, uncluttered appearance
- *Silent door locks that create a peaceful environment

PRODUCT SPECIFICATIONS

2.0mm Main wall thickness	40*38/28mm Outer frame
13*/40mm Sash width	Single layer 8mm white glass Glass configuration

SELECTIVE COLOR

Diamond black

Haoyue Silver



BREAKING THE
BOUNDARIES OF VISION

While pursuing fashion and trends
Pay attention to the layout of the living space
and the perfect combination of functional use.



SMOOTH, STABLE
CLOSED-LOOP EXPERIENCE

A Perfect Fit A Serene Private Retreat

Opens and closes smoothly

Precision-tuned load-bearing and
opening/closing systemDelivers a silky-smooth
opening and closing experienceLight and
smooth operation, exuding a premium feel



Concealed hinge

The hinges are completely concealed between
the door panel and the door frame.When the
door is closed, no hardware is visible from either
the inside or the outside.The facade is
exceptionally clean and uncluttered.



Magnetic Silent Door Lock


The latch automatically snaps into place when
the door closesEliminating impact noiseLeaving
only a soft, gentle soundCreating a serene space



Soft Start +
Bidirectional Damping



Stable resistance to
swaying and sinking

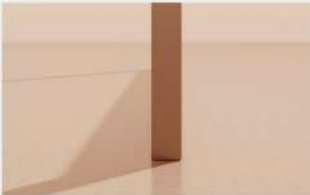

Design without
guide wheels

PIVOT DOOR

PIVOT GATE FEATURES

Based on aesthetic and humanized design principles.

When opened, the space suddenly becomes clear;

When closed, enjoy the peaceful protection. A face width of 83mm effectively reduces the obstruction of outdoor scenery;

The industry-leading hidden ground rail design allows the track to be fully embedded and level with the ground, both aesthetically pleasing and practical.

PRODUCT SPECIFICATIONS

wind resistance – test pressure	9
water tightness	5
acoustic performance (with Rw per IGU 42dB)	27 dB
athermal transmittance	2.1 W/m2K
air permeability	5

SELECTIVE COLOR



Silk Silver



Graphite Black



Light Luxury




Graphite Black





EXTERNAL PANEL



- 

Face width is only 83mm
- 

Hidden track
- 

Prevent hand pinching
- 

Barrier-Free Accessibility
- 

intelligent control
- 

Arbitrary positioning

**PRECISION
CRAFTSMANSHIP**

DOMINA continues the manufacturing experience of its parent company SILVELOX in the eld of doors and windows for over 60 years, combining modern craftsmanship to give every component and detail a stunning texture and beauty.



**EXTREMELY
NARROW BORDE**

On the premise of ensuring safety, incorporate a larger scenic area into the indoor space through extremely narrow borders. With the support of leading technology and craftsmanship, we continuously break industry records expand our horizons to a new width, and achieve near zero sensitivity

DREAMER SUNROOM

PRODUCT HIGHLIGHTS

- 125 large side beam design, meeting the requirements of large-span design
- 3.0mm thick beam column frame structure
- Multi curved Roman columns and decorative flowers, with a rounded and elegant appearance
- Can be designed with LED light slots to meet lighting needs while being more eye-catching
- Specially designed connector slots for beams and columns

PRODUCT SPECIFICATIONS

3.0mm	125*125mm	177*192mm
Main wall thickness	Outer frame	sink

SELECTIVE COLOR



Flash Silver Grey



Metal coffee




DREAMER SUNROOM

- 
flat top
- 
Diamond Top
- 
sloping roof
- 
Herringbone top
- 
Combination Top



**SUPER STRONG
LOAD-BEARING STRUCTURE**

125x4.0 can be fitted with steel large edge beams+3.0 thickened beam column frameEasily achieve large-span design,Suitable for complex shapes such as curved and sloping tops

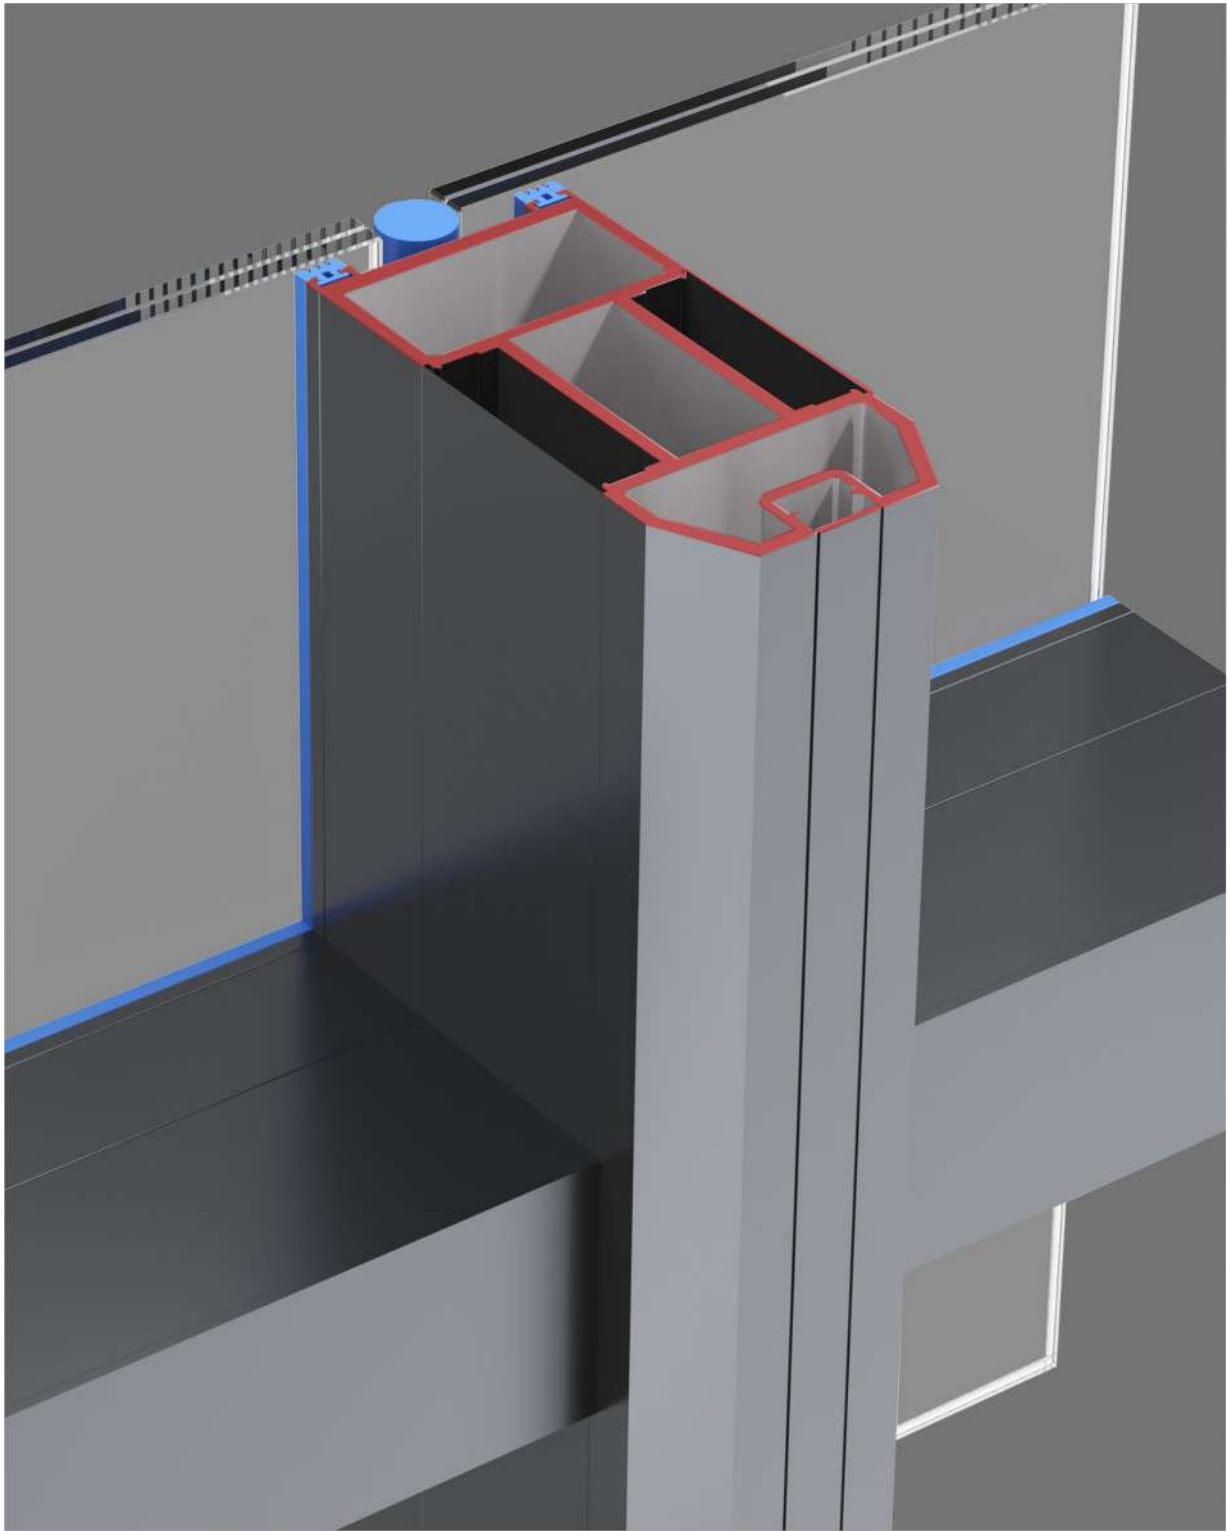

**INDUSTRY'S FIRST FAST
INSTALLATION SYSTEM**

Pre installed slot connectors for beams and columns+exposed design without screws50% increase in installation efficiency combining minimalist aesthetics with durability



HIGH END LIGHT LUXURY APPEARANCE

It has excellent functions of thermal insulation,
sound insulation, and noise reduction,
Perfectly separate home environment and urban space.